





QR code for Installations Instructions



The unit must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. This device falls under class one and must be grounded!

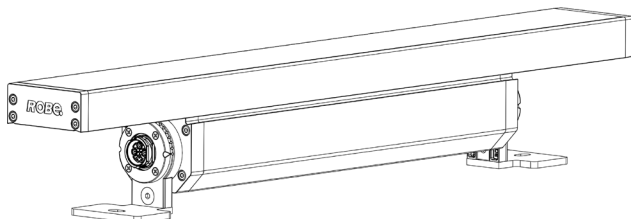


Eminere with standard mounting brackets.

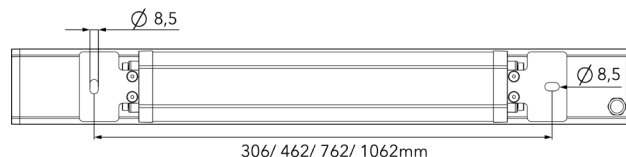

Brackets spacing.


### STEP 1.A MOUNTING AND TILTING - STANDARD BRACKETS

1

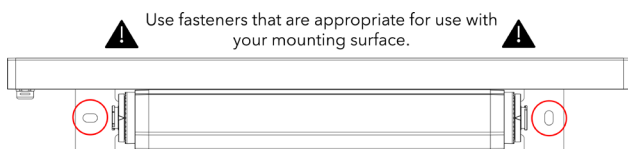



The Eminere can be arranged in any orientation on a flat, non-flammable surface by means of two mounting brackets. Two mounting holes can be drilled into the mounting surface according to brackets spacing and size of fasteners, prior to mounting of the fixture.

2

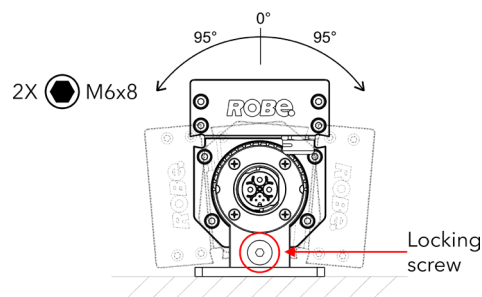


Release locking screw M6x8 on each sides. Position fixture and tighten by screws via brackets holes to pre-drilled holes on the surface. Angle fixture to desired position and tighten locking screw on each sides.

### STEP 1.B INSTALLATION WITH WALL-MOUNT BRACKETS

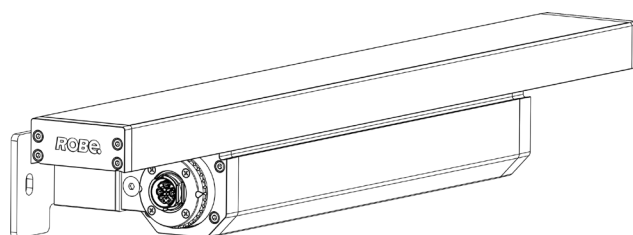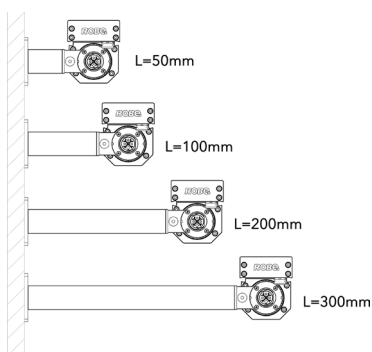


Eminere with longer Mounting Brackets.

1

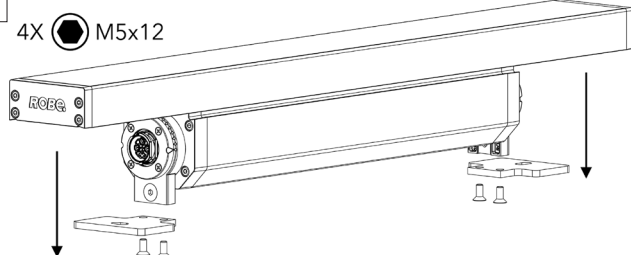


Undo 2x standard mounting brackets.

2

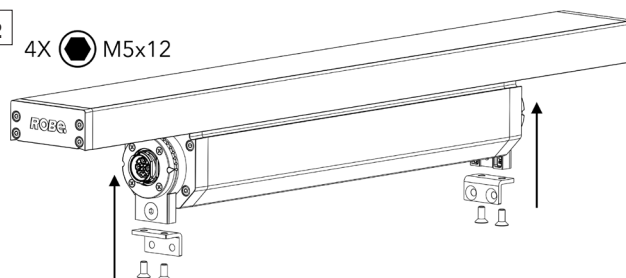


Install 2x L-shape brackets.

**3** 4X M5x12

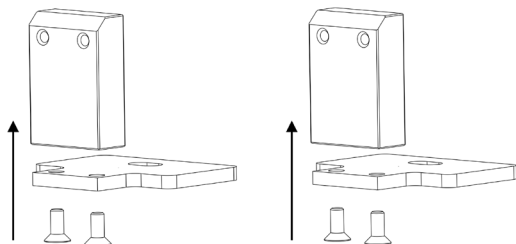


Connect together 2x wall-mount brackets.

**4** 4X M5x12

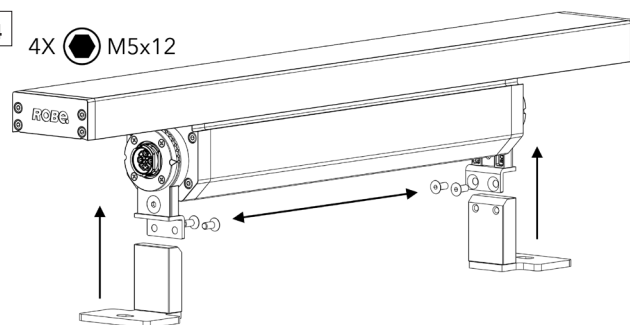


Screw in 2x wall-mount brackets to the fixture.

**5** Use fasteners that are appropriate for use with your mounting surface.

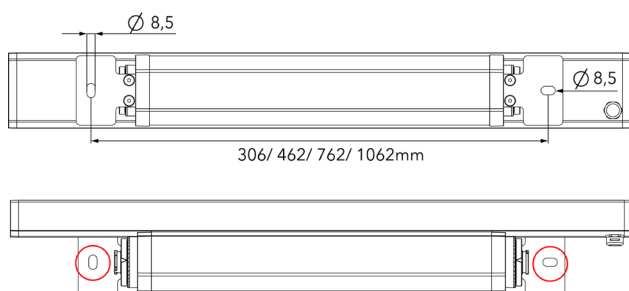

Fixture can be mounted in any orientation on a flat, non-flammable surface. Luminaire can be tilted for easier access to mounting holes (see next step).


**6** 2X M6x8

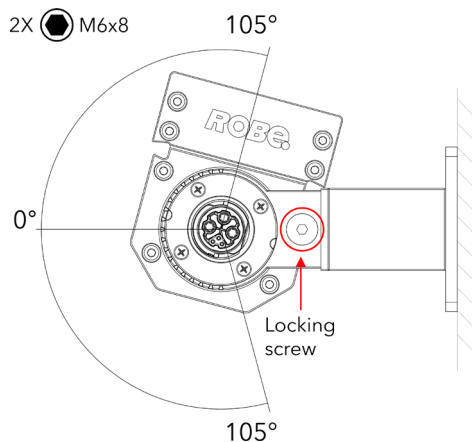

Fixture with longer Mounting brackets can be tilted by +105°/-105°. Loosen M6x8 locking screws on both sides, adjust fixture to desired angle (mount fixture to the surface, if it's not done yet) and tighten locking screws on both sides.


### STEP 1.C INSTALLATION WITH WALL-MOUNT BRACKETS

**1** 4X M5x12

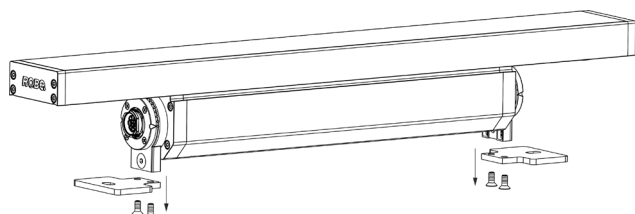

Unscrew the two screws on each side and remove standart mouting brackets.


**2**

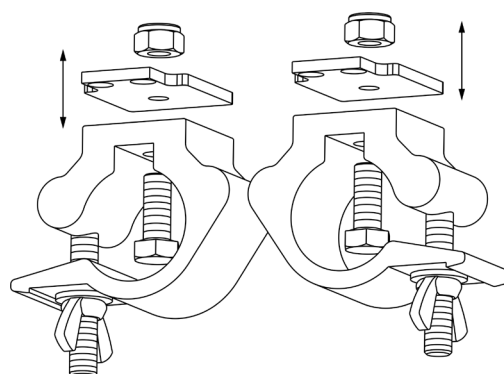

Two times screw the C-clamp and base(C-clamps) with the screw and self-locking nut.


3

4X  M5x12

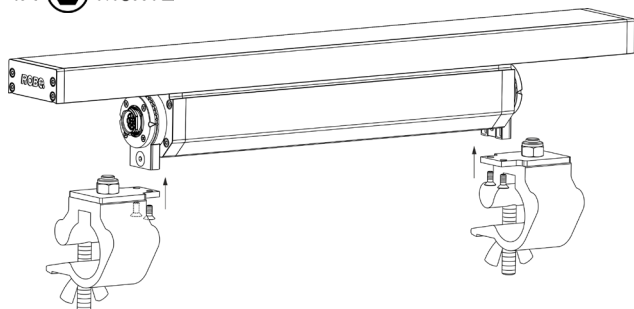



Screw the C-clamp Adaptors on each side with two screws.

4

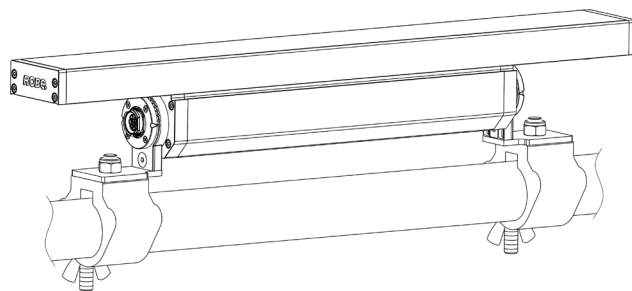


Place the fixture on the tubular structure and tighten the wing nuts on the C-clamp adaptor on each side.


## STEP 2 CONNECTION

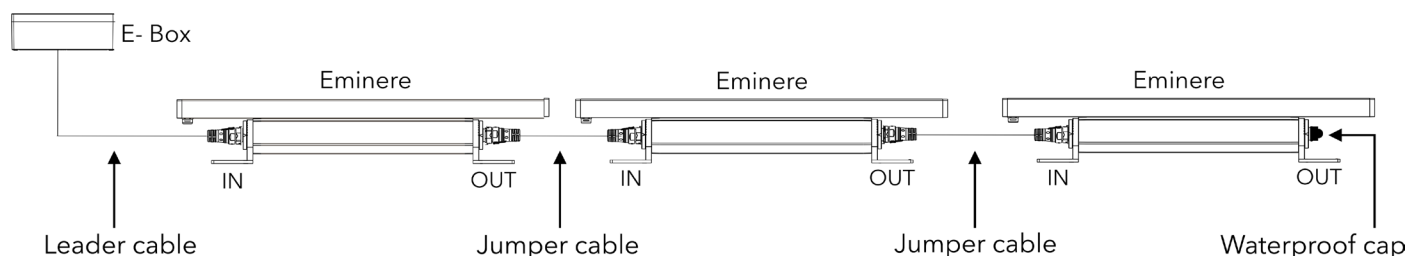


Fixture Input  
Connector shown



Fixture Output  
Connector shown

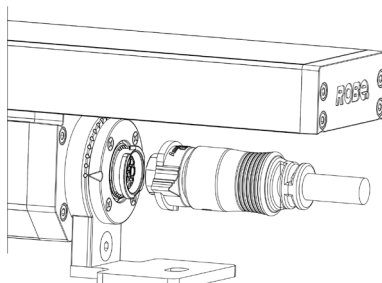

Jumper / Leader  
Cable

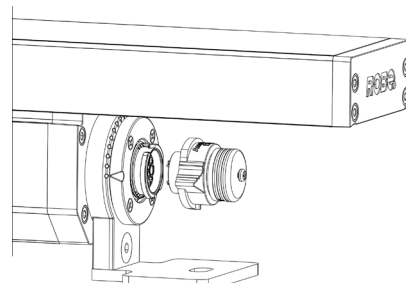

Waterproof cap  
Install on last fixture in a row.

## CONNECTION OF CABLE AND PANEL CONNECTORS




Same installation for Jumper/Leader cable and Waterproof cap.




### LOCK

1

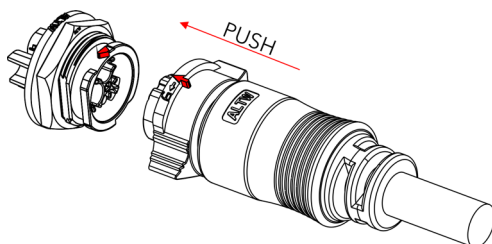


2

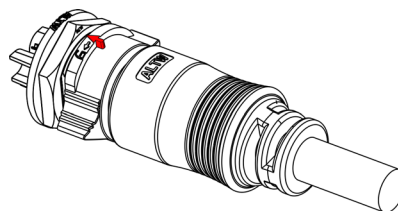


Please align the arrow symbol and mate the connector. Do NOT rotate the connector. Correct connection should be signaled by silent „click“ sound.

Mating complete.

### UNLOCK

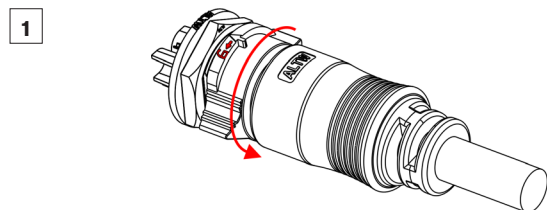



Rotate NUT 30 degrees anti-clockwise, same as the arrow direction. (Please do not rotate clockwise during unmating process)

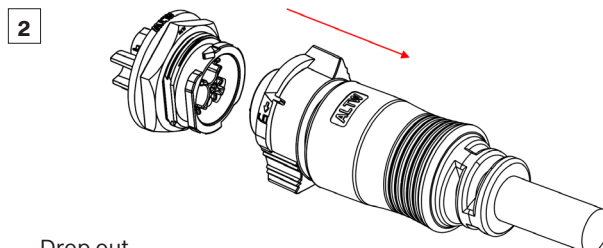

Drop out.

### ASSEMBLING OF FIELD INSTALLABLE CONNECTOR


- 1 Dismantle the connector and slide its parts onto the cable (5). Use the seal with inner diameter of 14.5 mm for the Anolis cable. The seal with inner diameter of 14.5 mm serves for cable of diameter 10-14.5mm. The seal with inner diameter of 10 mm serves for cable of diameter 8-10mm.

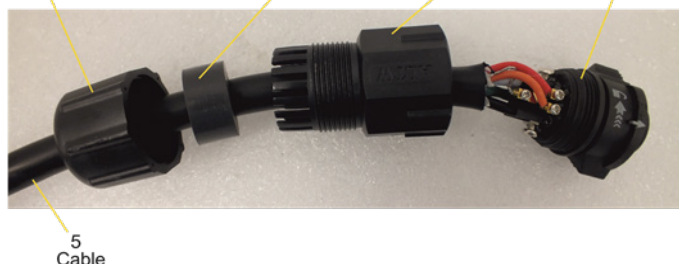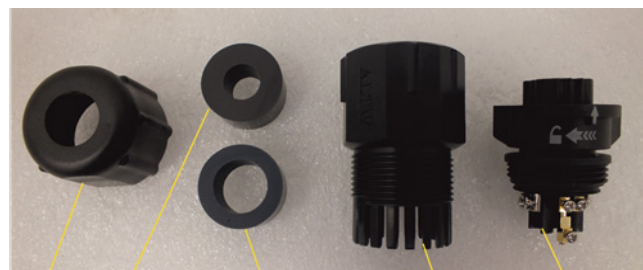


- 3 Put parts of the connector on the cable (5) and connect wires to the connector. First connect power wires (L,N, Earth) and after that data wires (D+, D-, 0V). Avoid excessive torsion of data wires!

US color code shown

MALE

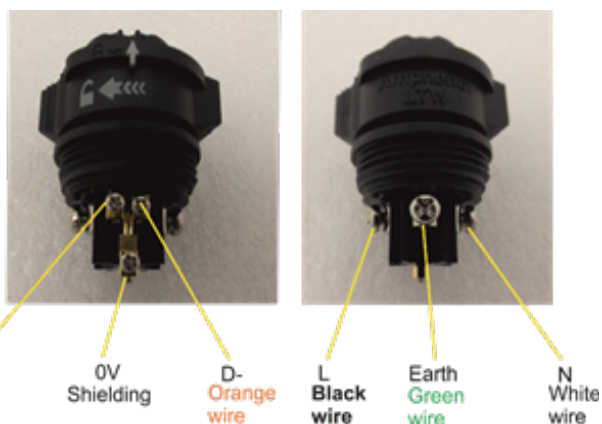


FEMALE

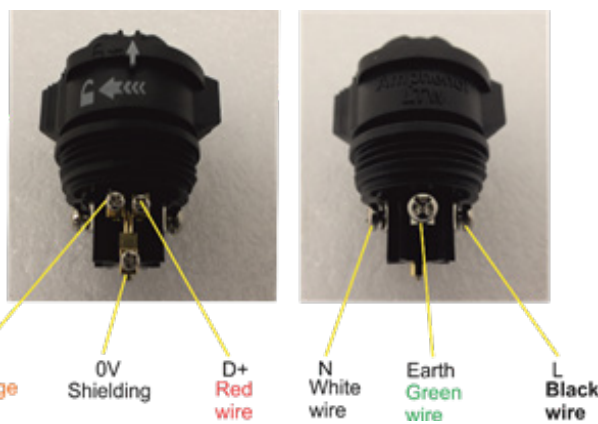


- 2 Remove insulation from the cable (5) and from individual wires and fasten three terminals on data wires.

US color code shown

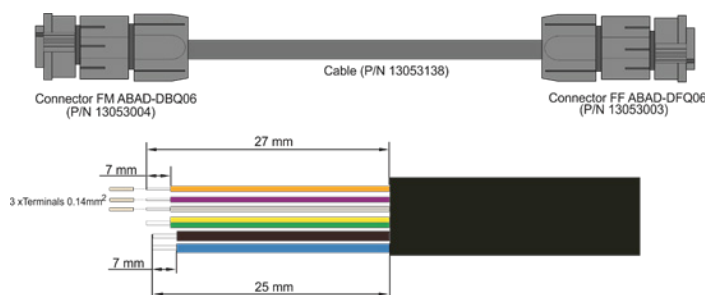


EU color code shown

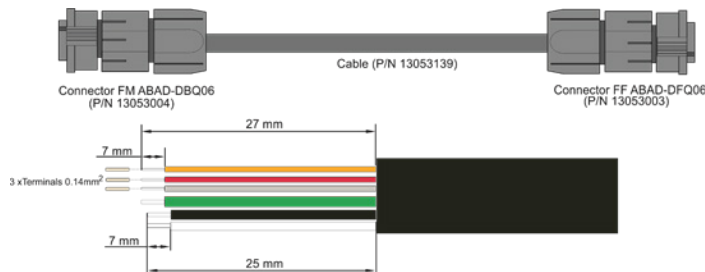

EU color code shown

MALE

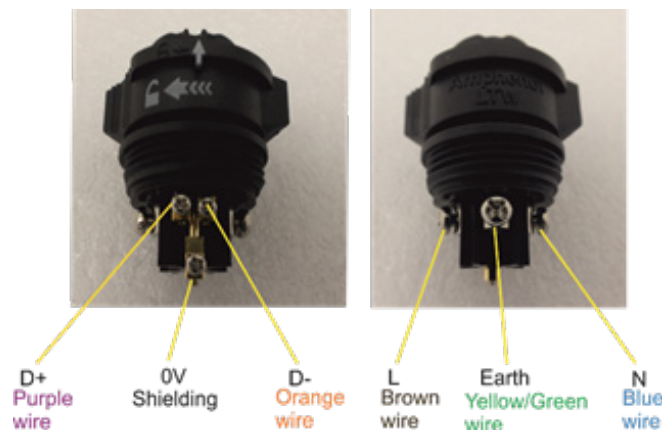

- 4** After connecting wires to the connector, tighten the three data wires (D+, D-, 0V) by means of the cable binder (6).



6 Cable binder


FEMALE



- 5** Screw the clamp ring (2) to the connector (1), insert the seal (3) to the clamp ring (2) and tighten the sealing nut (4) enough. During the steps DO NOT TWIST the cable (5).


- 6** Use the same procedure to assemble the connector on the second end of the cable.

Do not bend the cable near to the connector, minimum distance for bending is 50mm.

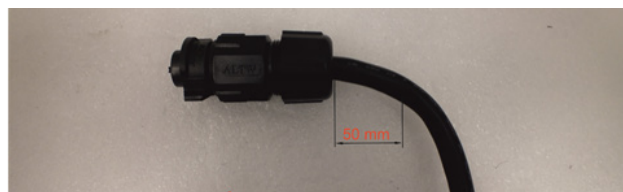





### STEP 3 INSTALLATION OF ACCESSORIES - CABLE COVER AND SHIELD

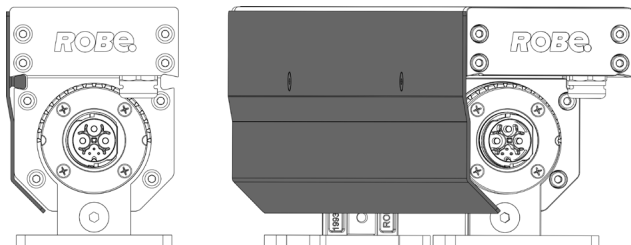


CABLE COVER

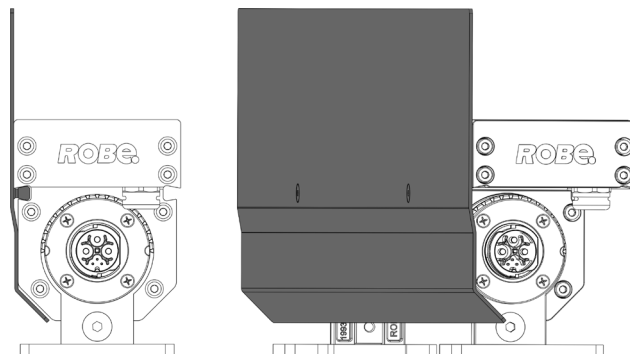

SHIELD


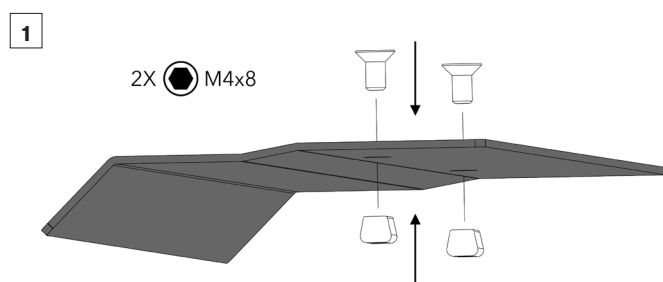


Install two sliders on the accessory via two prepared holes and two M4x8 screws. Do not tighten them completely yet.

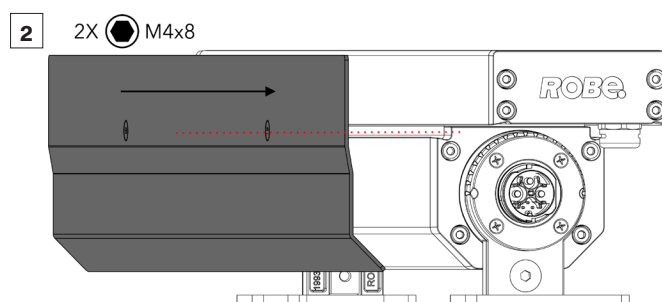


Slide the accessory into the groove on fixture's side. Center it and tighten the screws completely.


### STEP 3 INSTALLATION OF ACCESSORIES - OPTICAL DEMO SET

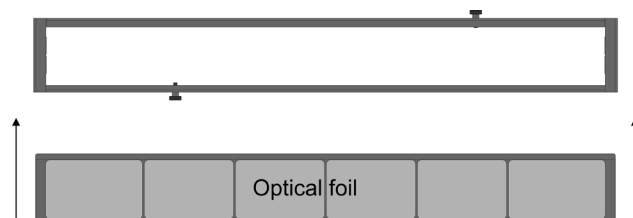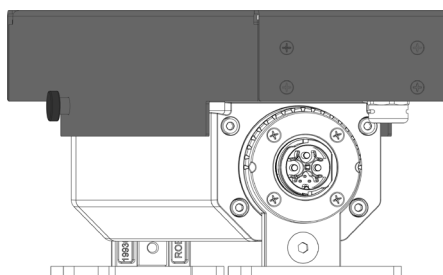

Optical Foil can be slide in the frame from the side after installation.

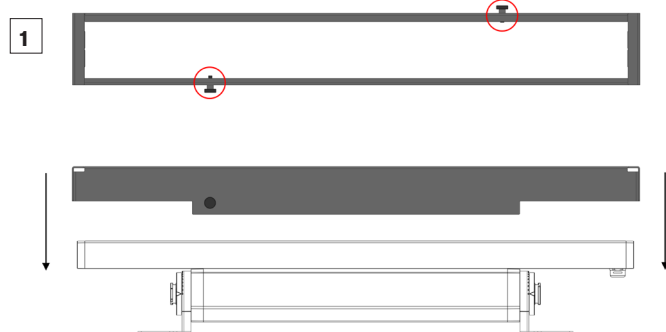

Loosen screws on both sides of the Optical Demo Set Frame and slide the Frame on top of the luminaire.

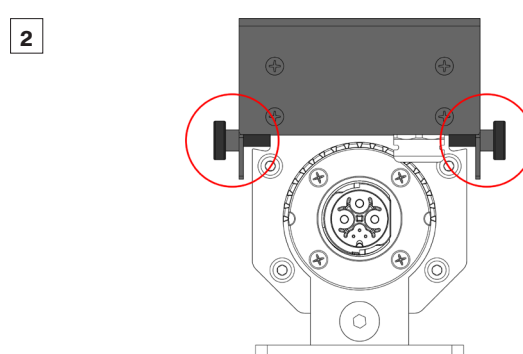

Tighten mounting screws on each side after frame installation. Do not over tighten screws.