

# ArcPower 36 <sup>tm</sup>



Client: \_\_\_\_\_

Project: \_\_\_\_\_


Specifier: \_\_\_\_\_

Type: \_\_\_\_\_ Qty: \_\_\_\_\_



**FEATURES:**

- Input Voltage: 100-240V AC 50-60Hz
- Power consumption: 60W (High Power 120W)
- Max Load Per Zone:
  - 36 x 1W LED's (RGB)
  - 42 x 1W LED's (RGBW)
  - 10 LED's RGBW (MC)
- Control: DMX 512, USITT
- Housing: Steel Plate
- Max Cable Length: 80m (High Power 20m)
- Fixing Method: 2 x Fixing holes
- IP Rating: IP2X
- Operating Ambient Temp: +40°C (+104°F)
- Certification: (ETL / cETL STD Power Only) , CE, RoHS
- 5 Year Warranty

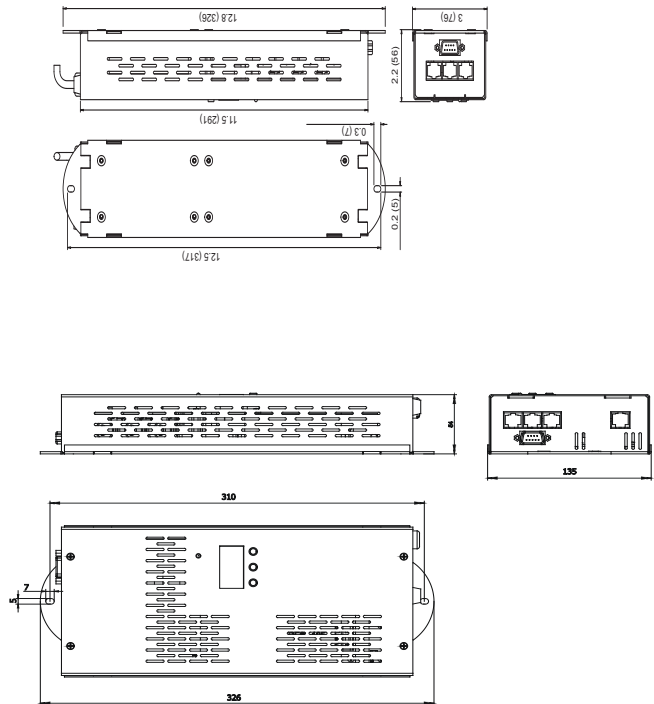

How To Order	GROUP	VARIANT	SIZE	COLOUR	OPTIC	FINISH	OPTIONS
ARC	1	2	3	4	5	6	7
	POW	IND	36	RGBW - Red, Green, Blue, White SW - Smart White HP - High Power HPSW - High Power Smart White		S - Silver B - Black W - White C - Custom	DMX - DMX DLI - Dali ART -Artnet
Example	ARCPower 36 HIGH POWER WHITE DALI						
ARC	POW	IND	36	HP		S	DLI

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu  
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 9RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk  
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: [954] 680-1910 - E.mail: info@anolislighting.com  
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au  
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au  
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu  
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu  
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu  
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

[www.anolis.eu](http://www.anolis.eu) | [www.anolislighting.com](http://www.anolislighting.com)

## Product Specification:

Electrical	Input Voltage		100-240V AC 50/60 Hz
	Power Consumption		60W (High Power Option 120W) +/-10%
	Max Output Current		350mA Per Colour (High Power Option 700mA)
Control	Interface Protocol		USITT, DMX512, DyNet, RS232
	Operation Modes		DMX, Master/ Slave, Stand-Alone
	Display		3 Digit LED
Physical	Width x Height x Depth	Inches	12.9 x 2.13 x 3 (High Power 12.9 x 2.52 x 5.32)
		mm	326 x 54 x 76 (High Power 326 x 64 x 135)
	Weight	lbs	2.43 (High Power 4)
		kg	1.1 (High Power 1.8)
	Number of Led Output Zones		1
	Maximum Load Per Zone	RGB	36 x 1W LED's (Smart White 36 x 1W LED's)
		RGBW	42 x 1W LED's
		RGBW (MC)	10 x MC LED's (Smart White 10 x MC LED's)
	Total Load	RGB	36 x 1W LED's (Smart White 36 x 1W LED's)
		RGBW	42 x 1W LED's
		RGBW (MC)	10 x MC LED's (Smart White 10 x MC LED's)
	DMX Channels		3, 4, 6, 7, 4 (Smart White 2, 1, 2, 2, 4)
	DMX Modes		5
	Built in Programs		2
	Editable Programs		1 (Upto 50 Steps Each)
	Max Cable Length		80m Max Per Zone (20m Max High Power)
	LED Output Connection		RJ45
	DMX Connection		RJ45
	RS232 Connection		DE-9 (Male)
	Fixing Method		2 Mounting Holes
IP Rating		IP2X	
IK Rating		N/A	
Cooling System		Convection	
Operating Temperature Range		-10°C / +40°C (14°F / +104°F)	
Certification	Listings		ETL / cETL (STD POWER ONLY), CE, RoHS

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Cable Joiner (included)
	RJ45 / DMX 3 Pin Adaptor (Included)
	RJ45 / DMX 5 Pin Adaptor (Included)



ROBE lighting s.r.o., Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu  
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk  
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: [954] 680-1910 - E.mail: info@anolislighting.com  
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au  
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au  
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu  
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu  
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu  
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

[www.anolis.eu](http://www.anolis.eu) | [www.anolislighting.com](http://www.anolislighting.com)