

ArcLine Outdoor Optic (White) tm



Client: _____

Project: _____


Specifier: _____

Type: _____ Qty: _____



FEATURES:

- Input Voltage: 48V DC Via ArcPower Range
- Power consumption: 6.8W, 13,6W, 20.4W, 27.2W, 40.8W
- Light Source: 6, 12, 18, 24, 36
- Delivered Lumen Range: 546 - 3534lm (Cool White)
- 524 - 3408lm (Warm White)
- Projected LED Life: 50,000 Hrs
- Lumen Output Per Foot: 589lm (Cool White - 15dg)
- Control: DMX Controller
- Housing: Extruded Aluminium - Glass Cover
- Fixing Method: Mounting Brackets
- IP Rating: IP65
- Operating Ambient Temp: -20°C/+40°C (-4°F/+104°F)
- Certification: ETL / cETL, CE, RoHS
- 5 Year Warranty

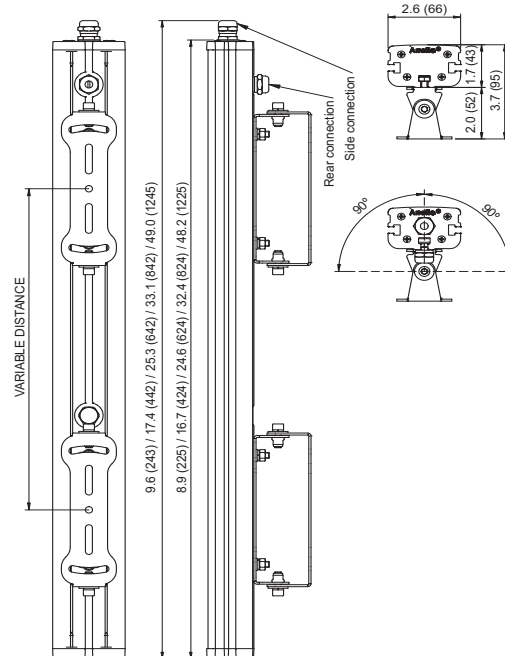


How To Order	GROUP	VARIANT	SIZE	COLOUR	OPTIC	FINISH	OPTIONS
ARC	1	2	3	4	5	6	7
	LNE	OUT	6	PW - Pure White	16°	S - Silver	CUS - Custom
			12	SW - Smart White	25°	B - Black	MTP -Multiple
			18		35°	W - White	REN - Rear Entry
			24		EL°	C - Custom	SEN - Side entry
			36				CCL - Custom Cable Length
Example	ARCLINE OUTDOOR 12 SMART WHITE ELLIPTICAL WHITE MULTIPLE						
ARC	LNE	OUT	12	SW	EL	W	MTP -Multiple

Colour temperature to be specified at time of order


ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 ANOLIS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com


Connection Scheme:

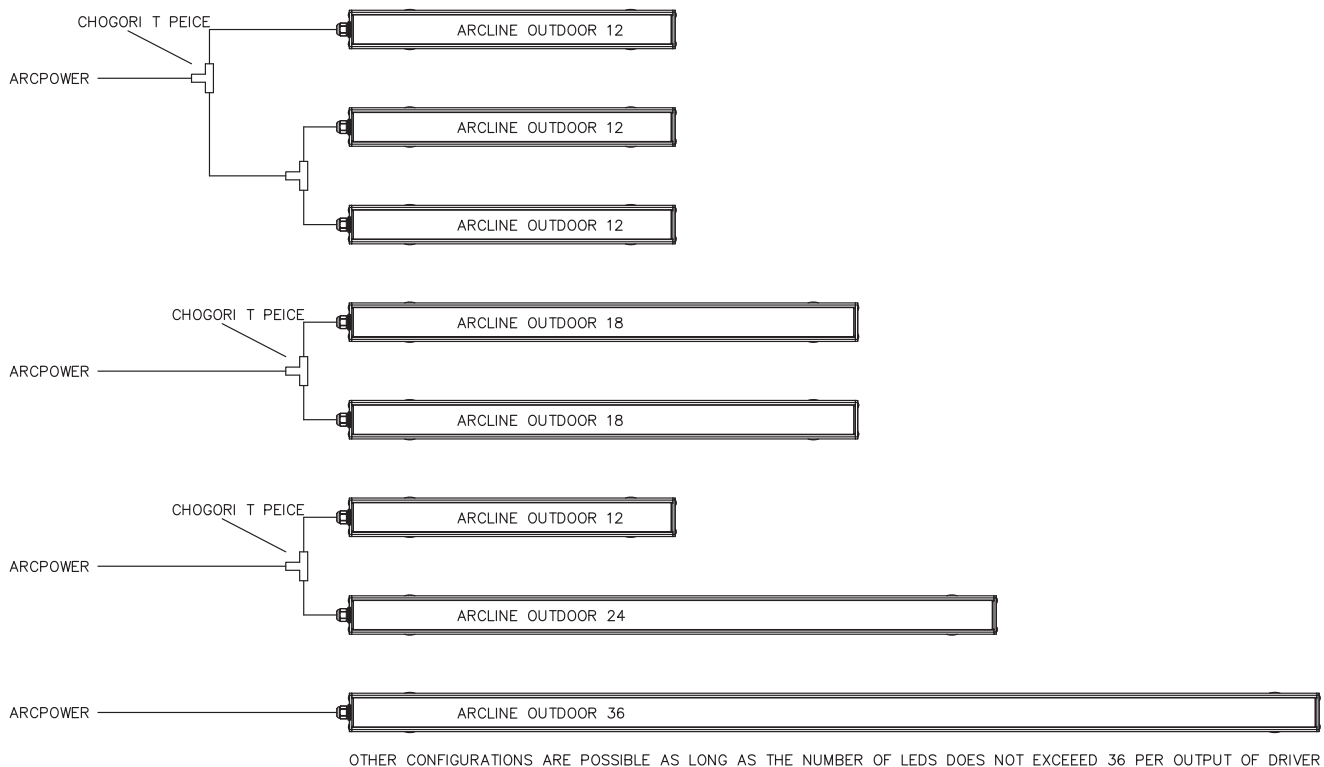


1. ArcLine Outdoor Optic

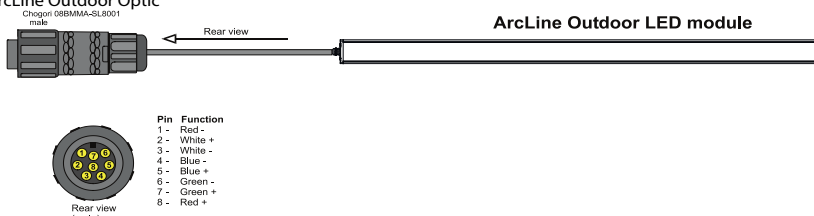

2. Adapter cable Chogori -RJ45 (it is not a standard part of delivery)

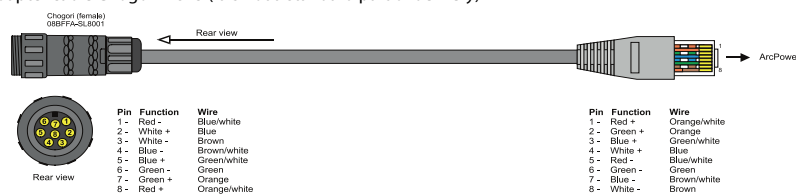

3. Adapter cable Chogori -Chogori (it is not a standard part of delivery)

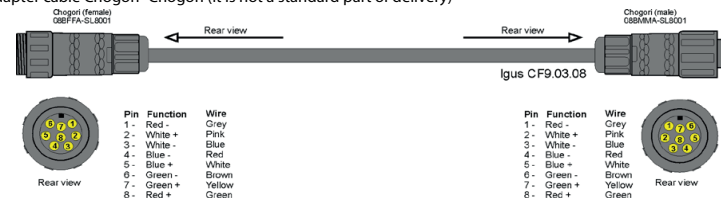

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E.mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Accessories:



Shield ArcLine Outdoor 1200mm



Shield ArcLine Outdoor 800mm



Shield ArcLine Outdoor 600mm

Extension Cable CGR8-F / RJ45, L0.25m
 Extension Cable CGR8-F / RJ45, L3m
 Extension Cable CGR8-F / RJ45, L7m
 Extension Cable CGR8-F / RJ45, L15m
 Extension Cable CGR8-F / RJ45, L20m
 other lengths on request



Extension Cable CGR8-F / M, L1m
 Extension Cable CGR8-F / M, L3m
 Extension Cable CGR8-F / M, L7m
 Extension Cable CGR8-F / M, L10m
 Extension Cable CGR8-F / M, L20m
 other lengths on request



Connector CGRBDU-08BFFA-SL8001



Connector CGRBDU-08BMMA-SL8001



T-Connector Chogori, 8-Pin, Screw



Connector Waterproof cap
(Fits Above Connector)



Connector Waterproof cap
(Fits Above Connector)

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Product Specification:

Electrical	Input Voltage		48V DC
	Power Consumption		6.8W, 13.6W, 20.4W, 27.2W, 40.8W
Optical	Light Source	PW	6, 12, 18, 24, 36, x High Power LEDs
		SW	3200K, 4300K, 6500K
	LED Channel		Pure White, Smart White
	Beam Angle		16°, 25°, 35°, 45°x18°
	Projected Lumen Maintenance		50,000 hrs (L70@ 25°C / 77°F)
Control	Wireless DMX (Optional Accessory)		N/A
	Control System		Anolis Lighting Controls or any Third Party DMX512 Controllers
	Power Supply		ArcPower Range
	Stand Alone Control		N/A
Physical	Width x Height x Depth	Inches	9.53, 17.33, 26.2, 33.2, 48.9 x 3.75 x 2.6
		mm	242, 440, 665, 843, 1241 x 95 x 66
	Weight	lbs	2.07, 4.07, 7.12, 8.13, 11.15
		kg	1.1, 2, 3.5, 4, 5.4
	Housing		Extruded Aluminium Glass cover
	Fixture Cable and Connections		LiYY 8xAWG22 - 0.5m (1.64ft) - Chogori IP68 Connector
	Fixing Method		Mounting Brackets
	Adjustability		+/-90°
	IP Rating		IP65
	IK Rating		IK07
	Cooling system		Convection
	Operating Ambient Temperature		-20°C / +40°C (-4°F / +104°F)
Operating Temperature		+50°C @ Ambient +40°C (+122°F @ Ambient +104°F)	
Certification	Listings		ETL / cETL, CE, RoHS

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Allen Key (Included)
	Connector Chogori CGRBDU-08BFFA (Female) IP68 (Included)
	Connector Chogori CGRBDU-08BMMA (Male) IP68
	Connector Chogori T Piece
	Connector Waterproof Cap (Male)
	Cable Chogori (Female) - RJ45 3m
	Cable Chogori (Female) - RJ45 7m
	Cable Chogori (Female) - RJ45 15m
	Cable Chogori (Female) - RJ45 20m
	<i>other lengths on request</i>




ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E.mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:


ArcLine Outdoor Optic 6 CW - 15°

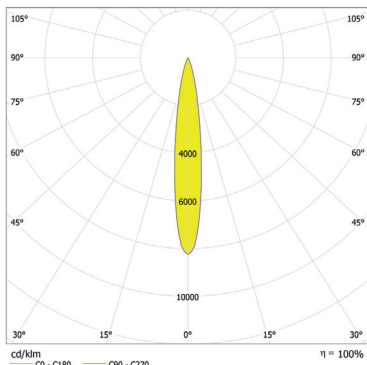

Distance [m]	Cone Diameter [m]	E(0°) [cd/km]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.14	19435	7.7° 9562		
1.0	0.27	4889	7.7° 2391		
1.5	0.41	2159	7.7° 1062		
2.0	0.54	1215	7.7° 598		
2.5	0.68	777	7.7° 382		
3.0	0.81	540	7.7° 266		

Total Luminous Flux: 589lm


ArcLine Outdoor Optic 6 CW - 37°

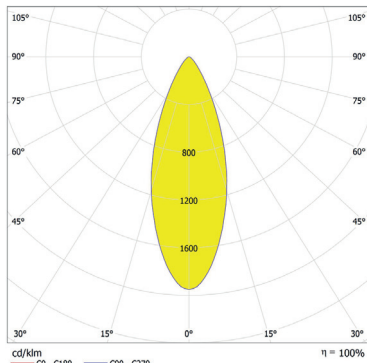

Distance [m]	Cone Diameter [m]	E(0°) [cd/km]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.34	4384	18.6° 1868		
1.0	0.67	1096	18.6° 467		
1.5	1.01	487	18.6° 208		
2.0	1.35	274	18.6° 117		
2.5	1.68	175	18.6° 75		
3.0	2.02	122	18.6° 52		

Total Luminous Flux: 562lm


ArcLine Outdoor Optic 6 CW - 25°

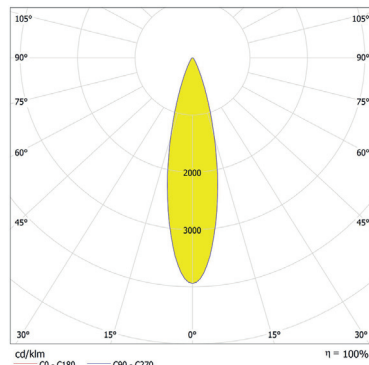

Distance [m]	Cone Diameter [m]	E(0°) [cd/km]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.22	9000	12.5° 4221		
1.0	0.44	2250	12.5° 1055		
1.5	0.67	1000	12.5° 469		
2.0	0.89	543	12.5° 264		
2.5	1.11	360	12.5° 169		
3.0	1.33	230	12.5° 117		

Total Luminous Flux: 571lm

ArcLine Outdoor Optic 6 CW - 44° x 17°

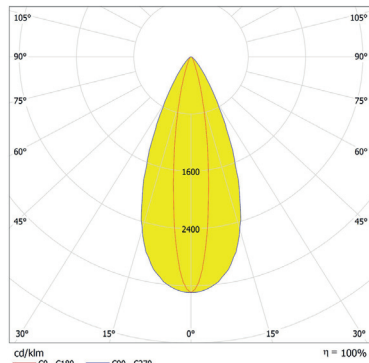


Distance [m]	Cone Diameter [m]	E(0°) [cd/km]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.41	7642	22.1° 3624		
0.5	0.15	3024	8.5° 3732		
1.0	0.81	1911	22.1° 764		
1.0	0.30	764	8.5° 933		
1.5	1.22	849	22.1° 339		
1.5	0.45	339	8.5° 415		
2.0	1.62	478	22.1° 191		
2.0	0.60	191	8.5° 233		
2.5	2.03	306	22.1° 122		
2.5	0.75	122	8.5° 149		
3.0	2.44	212	22.1° 85		
3.0	0.90	85	8.5° 104		

Total Luminous Flux: 580lm

For foot Candles divide lux by 10.7

ArcLine Outdoor Optic 6 CW - 31°

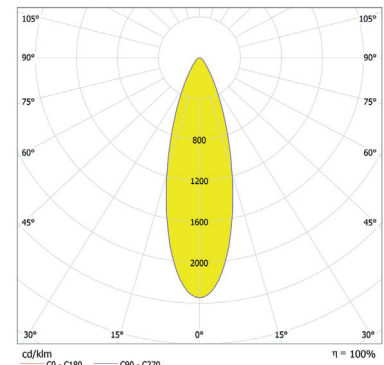

Distance [m]	Cone Diameter [m]	E(0°) [cd/km]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.28	5127	15.6° 2307		
1.0	0.56	1282	15.6° 577		
1.5	0.84	570	15.6° 256		
2.0	1.12	330	15.6° 144		
2.5	1.40	205	15.6° 92		
3.0	1.68	142	15.6° 64		

Total Luminous Flux: 546lm


ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:

For foot Candles divide lux by 10.7


ArcLine Outdoor Optic 6 WW - 16°

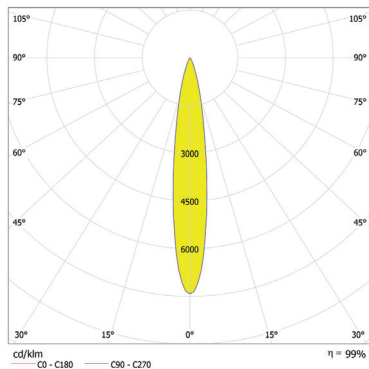

Distance [m]	Cone Diameter [m]	E(0°) [E(CD)]	E(8.0°) [E(CD)]	Illuminance [lx]
0.5	0.14	16857	8286	
1.0	0.28	4214	2071	
1.5	0.42	1873	921	
2.0	0.56	1054	518	
2.5	0.70	674	331	
3.0	0.84	468	230	

Total Luminous Flux: 568lm


ArcLine Outdoor Optic 6 WW - 25°

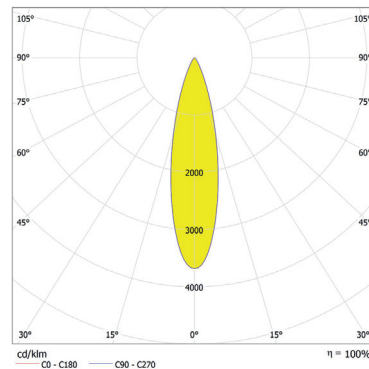

Distance [m]	Cone Diameter [m]	E(0°) [E(CD)]	E(12.7°) [E(CD)]	Illuminance [lx]
0.5	0.23	7952	3697	
1.0	0.45	1988	924	
1.5	0.68	884	411	
2.0	0.90	497	231	
2.5	1.13	318	148	
3.0	1.35	221	103	

Total Luminous Flux: 540lm


ArcLine Outdoor Optic 6 WW - 28°

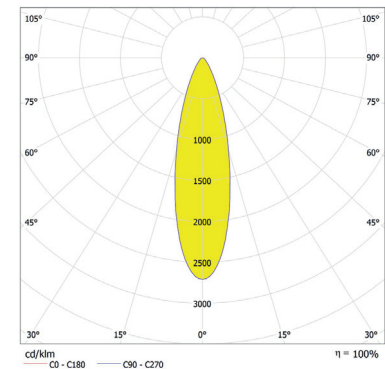

Distance [m]	Cone Diameter [m]	E(0°) [E(CD)]	E(14.1°) [E(CD)]	Illuminance [lx]
0.5	0.25	5678	2597	
1.0	0.50	1420	649	
1.5	0.75	631	289	
2.0	1.00	355	162	
2.5	1.26	227	104	
3.0	1.51	158	72	

Total Luminous Flux: 524lm


ArcLine Outdoor Optic 6 WW - 35°

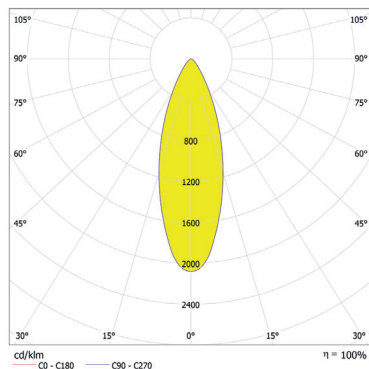

Distance [m]	Cone Diameter [m]	E(0°) [E(CD)]	E(17.3°) [E(CD)]	Illuminance [lx]
0.5	0.31	4410	1955	
1.0	0.62	1118	489	
1.5	0.93	497	217	
2.0	1.25	279	122	
2.5	1.56	179	78	
3.0	1.87	124	54	

Total Luminous Flux: 537lm

ArcLine Outdoor Optic 6 WW - 45°x18°

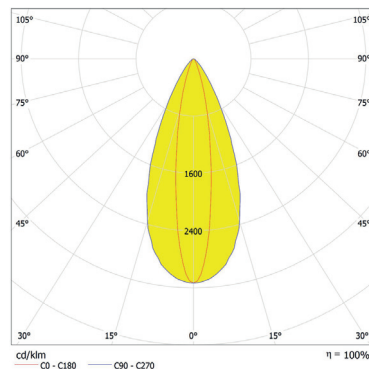

Distance [m]	Cone Diameter [m]	E(0°) [E(CD)]	E(9.0°) [E(CD)]	E(22.2°) [E(CD)]	Illuminance [lx]
0.5	0.41	6815	2728	1296	
1.0	0.82	1704	682	324	
1.5	1.22	757	303	144	
2.0	1.63	426	170	81	
2.5	2.04	273	109	52	
3.0	2.45	189	76	36	


Total Luminous Flux: 544lm

ROBE lighting s.r.o., Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.com.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:

ArcLine Outdoor Optic 12 CW - 15°

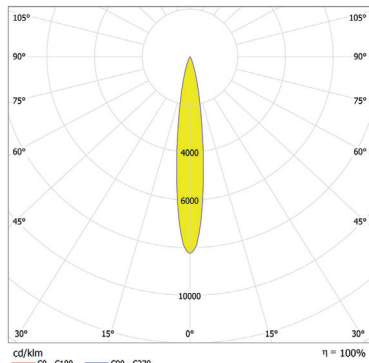


Distance [m]	Cone Diameter [m]	E(0°) [lx]	E(C90) [lx]
0.5	0.14	38869	19124
1.0	0.27	9717	4781
1.5	0.41	4319	2125
2.0	0.54	2428	1195
2.5	0.68	1555	765
3.0	0.81	1080	531

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 15.4°)

Total Luminous Flux: 1178lm

ArcLine Outdoor Optic 12 CW - 25°

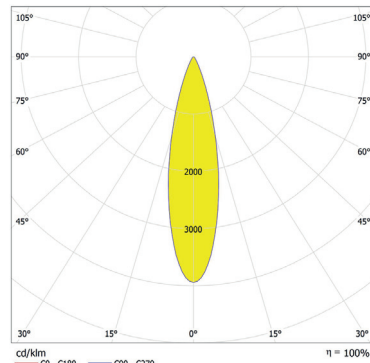


Distance [m]	Cone Diameter [m]	E(0°) [lx]	E(C90) [lx]
0.5	0.22	18016	8450
1.0	0.44	4504	2113
1.5	0.67	2002	939
2.0	0.89	1138	528
2.5	1.11	721	338
3.0	1.33	500	235

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 25.0°)

Total Luminous Flux: 1143lm

For foot Candles divide lux by 10.7

ArcLine Outdoor Optic 12 CW - 31°

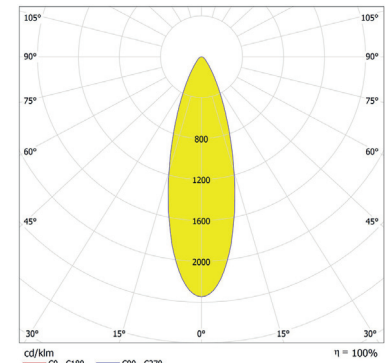


Distance [m]	Cone Diameter [m]	E(0°) [lx]	E(C90) [lx]
0.5	0.28	10263	4619
1.0	0.56	2566	1155
1.5	0.84	1140	513
2.0	1.12	641	289
2.5	1.40	411	185
3.0	1.68	285	128

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 31.2°)

Total Luminous Flux: 1093lm

ArcLine Outdoor Optic 12 CW - 37°

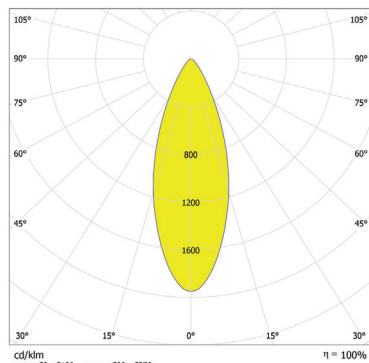


Distance [m]	Cone Diameter [m]	E(0°) [lx]	E(C90) [lx]
0.5	0.34	9768	3737
1.0	0.67	2192	934
1.5	1.01	974	415
2.0	1.35	548	234
2.5	1.68	351	149
3.0	2.02	244	104

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 37.2°)

Total Luminous Flux: 1124lm

ArcLine Outdoor Optic 12 CW - 44°x17°

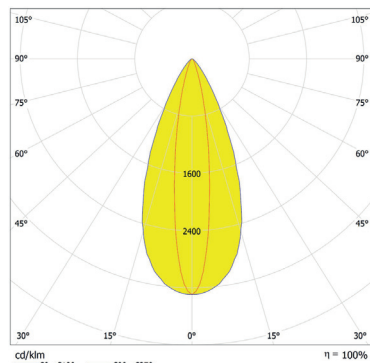

Distance [m]	Cone Diameter [m]	E(0°) [lx]	E(C90) [lx]	E(C170) [lx]
0.5	0.41	15284	6188	7463
1.0	0.81	3821	1527	1866
1.5	1.22	1698	679	829
2.0	1.62	955	382	466
2.5	2.03	611	244	299
3.0	2.44	435	170	207

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 17.0°)
C90 - C270 (Half-value Angle: 44.2°)


Total Luminous Flux: 1160lm

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E.mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:


ArcLine Outdoor Optic 12 WW - 16°

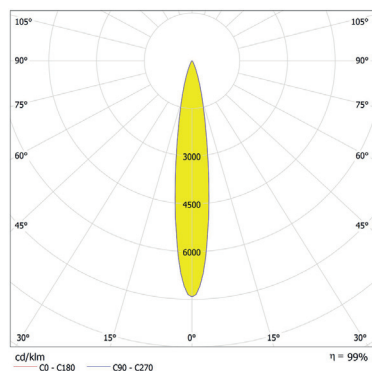

Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	E(0°)	E(CO)
0.5	0.14	33715	16571	8.0°	8.0°
1.0	0.28	8429	4143	8.0°	8.0°
1.5	0.42	3746	1841	8.0°	8.0°
2.0	0.56	2107	1036	8.0°	8.0°
2.5	0.70	1349	663	8.0°	8.0°
3.0	0.84	937	460	8.0°	8.0°

Total Luminous Flux: 1136lm

ArcLine Outdoor Optic 12 WW - 25°

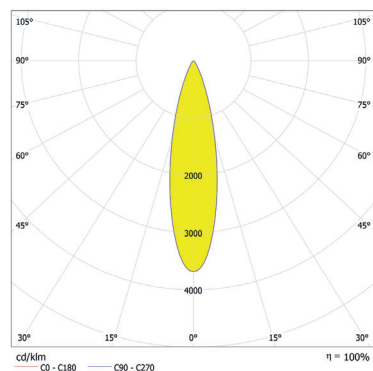


Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	E(0°)	E(CO)
0.5	0.23	15904	7394	12.7°	12.7°
1.0	0.45	3976	1948	12.7°	12.7°
1.5	0.68	1767	822	12.7°	12.7°
2.0	0.90	994	462	12.7°	12.7°
2.5	1.13	636	296	12.7°	12.7°
3.0	1.35	442	205	12.7°	12.7°

Total Luminous Flux: 1080lm

For foot Candles divide lux by 10.7


ArcLine Outdoor Optic 12 WW - 28°

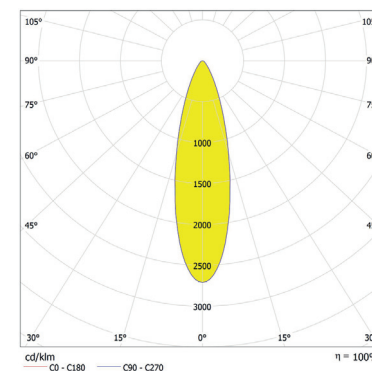

Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	E(0°)	E(CO)
0.5	0.25	11356	5195	14.1°	14.1°
1.0	0.50	2839	1299	14.1°	14.1°
1.5	0.75	1262	577	14.1°	14.1°
2.0	1.00	710	325	14.1°	14.1°
2.5	1.26	454	208	14.1°	14.1°
3.0	1.51	315	144	14.1°	14.1°

Total Luminous Flux: 1048lm


ArcLine Outdoor Optic 12 WW - 35°

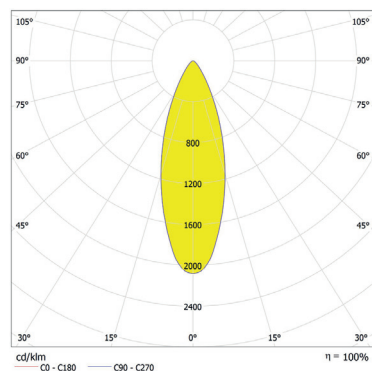

Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	E(0°)	E(CO)
0.5	0.31	8941	3910	17.3°	17.3°
1.0	0.62	2235	978	17.3°	17.3°
1.5	0.93	993	434	17.3°	17.3°
2.0	1.25	559	244	17.3°	17.3°
2.5	1.56	358	156	17.3°	17.3°
3.0	1.87	248	109	17.3°	17.3°

Total Luminous Flux: 1074lm

ArcLine Outdoor Optic 12 WW - 45°x18°

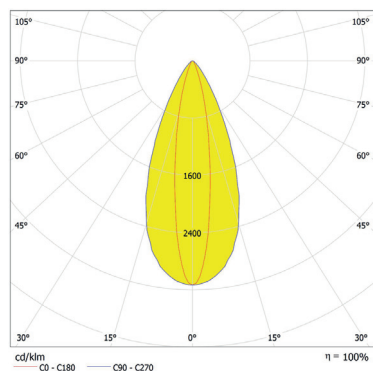

Distance [m]	Cone Diameter [m]	E(0°)	E(C90)	E(CO)	E(0°)	E(C90)	E(CO)
0.5	0.41	13643	5468	6997	22.2°	22.2°	9.0°
1.0	0.82	3411	1365	1649	22.2°	22.2°	9.0°
1.5	1.22	1516	607	733	22.2°	22.2°	9.0°
2.0	1.63	833	341	412	22.2°	22.2°	9.0°
2.5	2.04	546	218	264	22.2°	22.2°	9.0°
3.0	2.45	379	152	183	22.2°	22.2°	9.0°


Total Luminous Flux: 1089lm

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.com.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:

ArcLine Outdoor Optic 18 CW - 15°

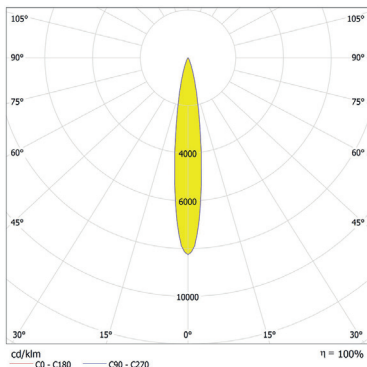


Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(C90)	E(C270)	Illuminance [lx]
0.5	0.14	58304	7.7°	28686		
1.0	0.27	14576	7.7°	7322		
1.5	0.41	6478	7.7°	3187		
2.0	0.54	3644	7.7°	1793		
2.5	0.68	2332	7.7°	1147		
3.0	0.81	1620	7.7°	797		

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 15.4°)

Total Luminous Flux: 1767lm

ArcLine Outdoor Optic 18 CW - 25°

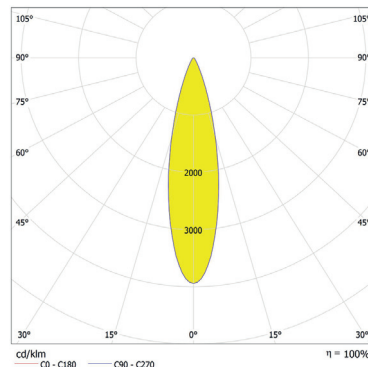


Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(C90)	E(C270)	Illuminance [lx]
0.5	0.22	27033	12.5°	12679		
1.0	0.44	6758	12.5°	3179		
1.5	0.67	3004	12.5°	1409		
2.0	0.89	1690	12.5°	792		
2.5	1.11	1081	12.5°	507		
3.0	1.33	751	12.5°	352		

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 25.0°)

Total Luminous Flux: 1715lm

For foot Candles divide lux by 10.7

ArcLine Outdoor Optic 18 CW - 31°

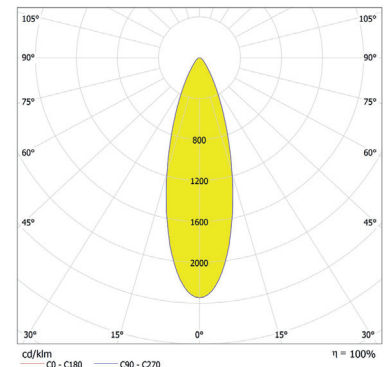


Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(C90)	E(C270)	Illuminance [lx]
0.5	0.28	15400	15.6°	6931		
1.0	0.56	3850	15.6°	1732		
1.5	0.84	1711	15.6°	770		
2.0	1.12	962	15.6°	433		
2.5	1.40	616	15.6°	277		
3.0	1.68	428	15.6°	193		

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 31.2°)

Total Luminous Flux: 1640lm

ArcLine Outdoor Optic 18 CW - 37°

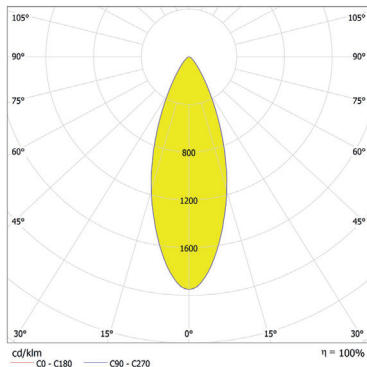


Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(C90)	E(C270)	Illuminance [lx]
0.5	0.34	13151	18.6°	5605		
1.0	0.67	3288	18.6°	1404		
1.5	1.01	1461	18.6°	623		
2.0	1.35	822	18.6°	350		
2.5	1.68	526	18.6°	224		
3.0	2.02	365	18.6°	156		

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 37.2°)

Total Luminous Flux: 1686lm

ArcLine Outdoor Optic 18 CW - 44°x17°

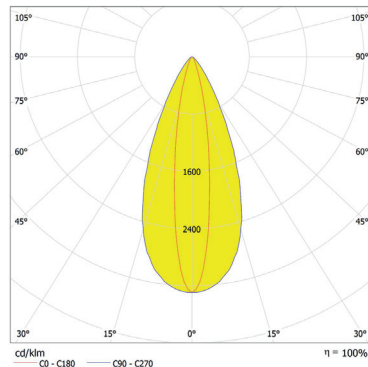

Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(C90)	E(C270)	Illuminance [lx]
0.5	0.41	22926	22.1°	9162	11195	
1.0	0.81	5732	22.1°	2291	2799	
1.5	1.22	2547	22.1°	1018	1244	
2.0	1.62	1433	22.1°	573	700	
2.5	2.03	917	22.1°	366	448	
3.0	2.44	637	22.1°	255	311	

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 17.0°)
C90 - C270 (Half-value Angle: 44.2°)


Total Luminous Flux: 1740lm

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E.mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:


ArcLine Outdoor Optic 18 WW - 16°

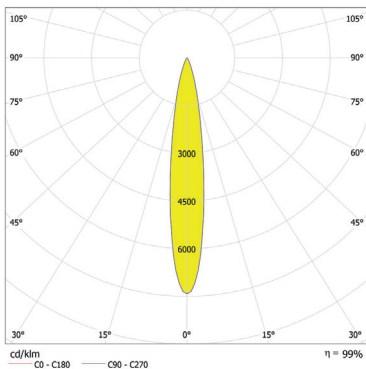

Distance [m]	Cone Diameter [m]	E(0°) E(CD)	E(8.0°) E(CD)	Illuminance [lx]
0.5	0.14	50572 24857	8.0°	
1.0	0.28	12643 6214	8.0°	
1.5	0.42	5619 2762	8.0°	
2.0	0.56	3161 1554	8.0°	
2.5	0.70	2023 994	8.0°	
3.0	0.84	1405 690	8.0°	

Total Luminous Flux: 1704lm

ArcLine Outdoor Optic 18 WW - 25°

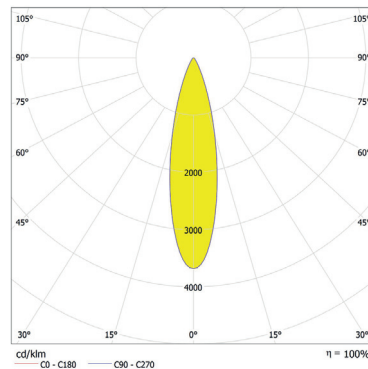


Distance [m]	Cone Diameter [m]	E(0°) E(CD)	E(12.2°) E(CD)	Illuminance [lx]
0.5	0.23	23856 11091	12.2°	
1.0	0.45	5964 2772	12.2°	
1.5	0.68	2651 1232	12.2°	
2.0	0.90	1491 693	12.2°	
2.5	1.13	954 444	12.2°	
3.0	1.35	663 308	12.2°	

Total Luminous Flux: 1620lm

For foot Candles divide lux by 10.7


ArcLine Outdoor Optic 18 WW - 28°

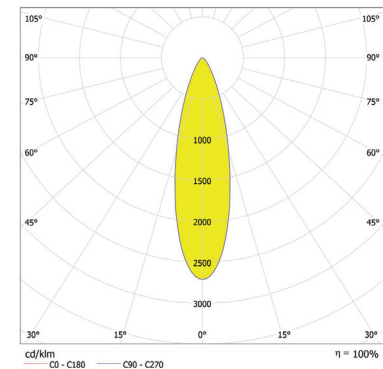

Distance [m]	Cone Diameter [m]	E(0°) E(CD)	E(14.1°) E(CD)	Illuminance [lx]
0.5	0.25	17045 7797	14.1°	
1.0	0.50	4261 1949	14.1°	
1.5	0.75	1894 866	14.1°	
2.0	1.00	1065 487	14.1°	
2.5	1.26	682 312	14.1°	
3.0	1.51	473 217	14.1°	

Total Luminous Flux: 1573lm


ArcLine Outdoor Optic 18 WW - 35°

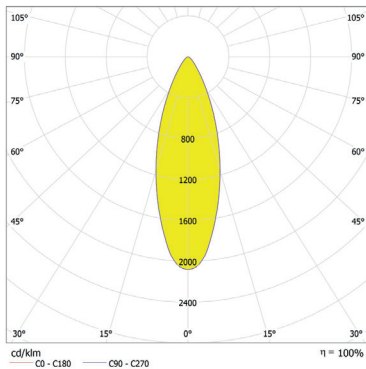

Distance [m]	Cone Diameter [m]	E(0°) E(CD)	E(17.3°) E(CD)	Illuminance [lx]
0.5	0.31	13420 5869	17.3°	
1.0	0.62	3355 1457	17.3°	
1.5	0.93	1491 652	17.3°	
2.0	1.25	839 367	17.3°	
2.5	1.56	537 235	17.3°	
3.0	1.87	373 163	17.3°	

Total Luminous Flux: 1612lm

ArcLine Outdoor Optic 18 WW - 45°x18°

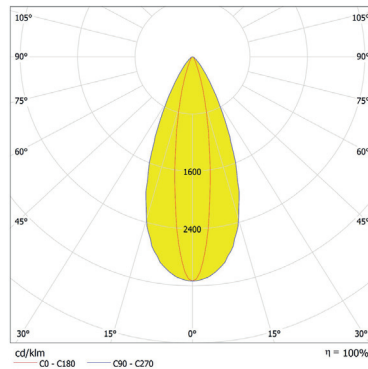

Distance [m]	Cone Diameter [m]	E(0°) E(CD)	E(22.2°) E(CD)	E(9.0°) E(CD)	Illuminance [lx]
0.5	0.41	20471 8193	22.2° 9.0°	8989	
1.0	0.82	5118 2048	22.2° 9.0°	2175	
1.5	1.22	2275 910	22.2° 9.0°	1100	
2.0	1.63	1279 512	22.2° 9.0°	619	
2.5	2.04	819 328	22.2° 9.0°	366	
3.0	2.45	569 228	22.2° 9.0°	275	


Total Luminous Flux: 1634lm

ROBE lighting s.r.o., Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.com.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E.mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:


ArcLine Outdoor Optic 24 CW - 15°

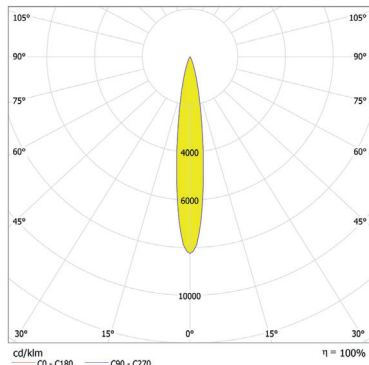

Distance [m]	Cone Diameter [m]	Beam Spread [m]	E(0°) [cd]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.14	0.28	77739	7.7° 38249	155478	15.5° 77739
1.0	0.27	0.54	19435	7.7° 9562	38870	7.7° 19435
1.5	0.41	0.81	8638	7.7° 4250	17276	7.7° 8638
2.0	0.54	1.08	4859	7.7° 2391	9718	7.7° 4859
2.5	0.68	1.36	3110	7.7° 1530	6220	7.7° 3110
3.0	0.81	1.62	2159	7.7° 1062	4318	7.7° 2159

Total Luminous Flux: 2356lm


ArcLine Outdoor Optic 24 CW - 37°

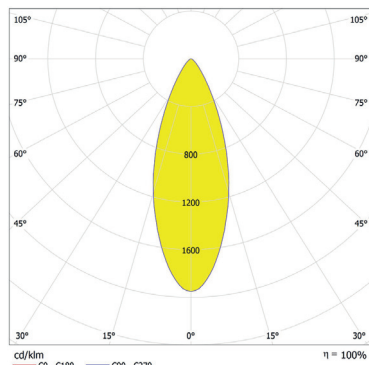

Distance [m]	Cone Diameter [m]	Beam Spread [m]	E(0°) [cd]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.34	0.68	17530	18.6° 7474	35060	18.6° 17530
1.0	0.67	1.34	4384	18.6° 1868	8768	18.6° 4384
1.5	1.01	2.01	1948	18.6° 830	3896	18.6° 1948
2.0	1.35	2.70	1096	18.6° 467	2192	18.6° 1096
2.5	1.68	3.36	701	18.6° 299	1402	18.6° 701
3.0	2.02	4.04	487	18.6° 208	974	18.6° 487

Total Luminous Flux: 2248lm


ArcLine Outdoor Optic 24 CW - 25°

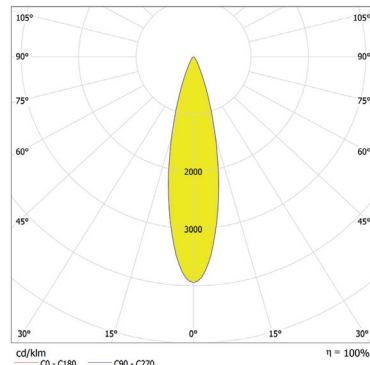

Distance [m]	Cone Diameter [m]	Beam Spread [m]	E(0°) [cd]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.22	0.44	36033	12.5° 16900	72066	12.5° 36033
1.0	0.44	0.88	9008	12.5° 4252	18016	12.5° 9008
1.5	0.67	1.34	4004	12.5° 1878	8008	12.5° 4004
2.0	0.89	1.78	2252	12.5° 1056	4504	12.5° 2252
2.5	1.11	2.22	1441	12.5° 676	2882	12.5° 1441
3.0	1.33	2.66	1001	12.5° 469	2002	12.5° 1001

Total Luminous Flux: 2286lm

ArcLine Outdoor Optic 24 CW - 44°x17°

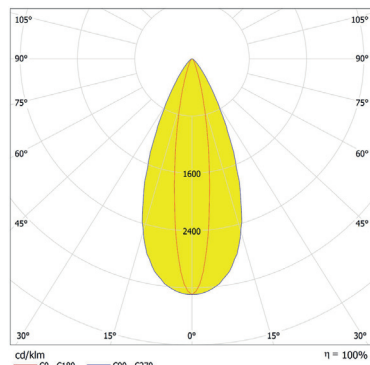


Distance [m]	Cone Diameter [m]	Beam Spread [m]	E(0°) [cd]	E(C90) [cd]	E(C0) [cd]	E(0°) [lx]	E(C90) [lx]	E(C0) [lx]
0.5	0.41	0.82	30568	22.1° 12266	8.5° 14927	61136	44.2° 24532	16854
1.0	0.81	1.62	7642	22.1° 3054	8.5° 3732	15284	88.4 4906	4171
1.5	1.22	2.44	3396	22.1° 1357	8.5° 1659	6792	132.8 735	1714
2.0	1.62	3.24	1911	22.1° 764	8.5° 933	3822	177.6 498	857
2.5	2.03	4.06	1223	22.1° 489	8.5° 597	2446	230.4 314	545
3.0	2.44	4.88	849	22.1° 339	8.5° 415	1698	267.2 231	383

Total Luminous Flux: 2320lm

For foot Candles divide lux by 10.7

ArcLine Outdoor Optic 24 CW - 31°

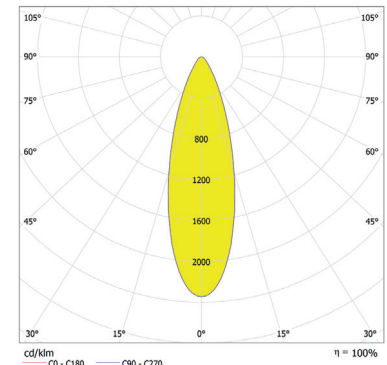


Distance [m]	Cone Diameter [m]	Beam Spread [m]	E(0°) [cd]	E(C0) [cd]	E(0°) [lx]	E(C0) [lx]
0.5	0.28	0.56	20327	15.6° 9238	40654	15.6° 20327
1.0	0.56	1.12	5132	15.6° 2310	10264	15.6° 5132
1.5	0.84	1.68	2281	15.6° 1026	4562	15.6° 2281
2.0	1.12	2.24	1383	15.6° 577	2766	15.6° 1383
2.5	1.40	2.80	821	15.6° 370	1642	15.6° 821
3.0	1.68	3.36	570	15.6° 257	1140	15.6° 570

Total Luminous Flux: 2186lm

Photometric Data:


ArcLine Outdoor Optic 24 WW - 16°

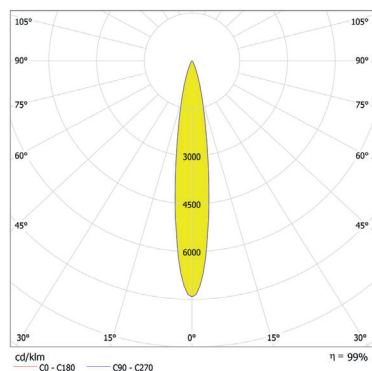

Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(0°)	E(C0)
0.5	0.14	67429	8.0°	33142	
1.0	0.28	16857	8.0°	8286	
1.5	0.42	7492	8.0°	3682	
2.0	0.56	4214	8.0°	2071	
2.5	0.70	2697	8.0°	1326	
3.0	0.84	1873	8.0°	921	

Total Luminous Flux: 2272lm

ArcLine Outdoor Optic 24 WW - 25°

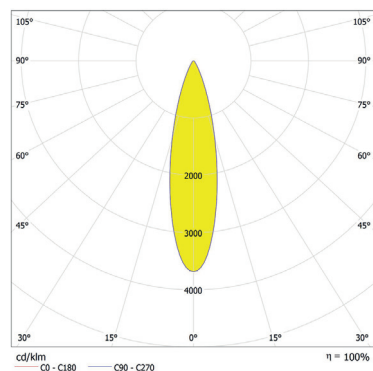


Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(0°)	E(C0)
0.5	0.23	31808	12.7°	14787	
1.0	0.45	7952	12.7°	3697	
1.5	0.68	3534	12.7°	1643	
2.0	0.90	1988	12.7°	924	
2.5	1.13	1272	12.7°	591	
3.0	1.35	884	12.7°	411	

Total Luminous Flux: 2160lm

For foot Candles divide lux by 10.7


ArcLine Outdoor Optic 24 WW - 28°

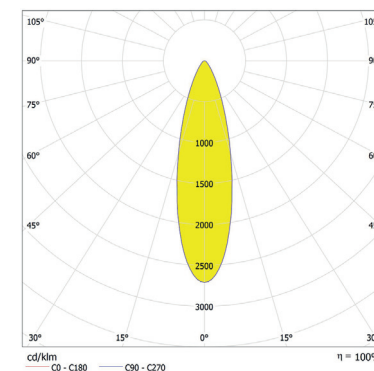

Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(0°)	E(C0)
0.5	0.25	22062	14.1°	10092	
1.0	0.50	5516	14.1°	2523	
1.5	0.75	2451	14.1°	1121	
2.0	1.00	1379	14.1°	621	
2.5	1.26	882	14.1°	404	
3.0	1.51	613	14.1°	280	

Total Luminous Flux: 2036lm


ArcLine Outdoor Optic 24 WW - 35°

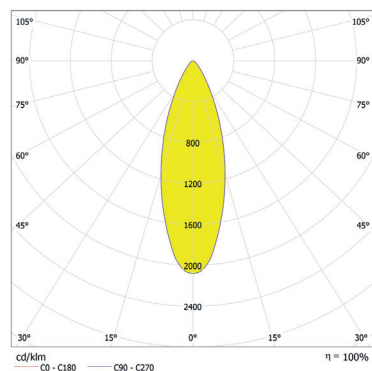

Distance [m]	Cone Diameter [m]	E(0°)	E(C0)	E(0°)	E(C0)
0.5	0.31	17882	17.3°	7821	
1.0	0.62	4470	17.3°	1955	
1.5	0.93	1987	17.3°	869	
2.0	1.25	1118	17.3°	489	
2.5	1.56	715	17.3°	313	
3.0	1.87	497	17.3°	217	

Total Luminous Flux: 2148lm

ArcLine Outdoor Optic 24 WW - 45°x18°

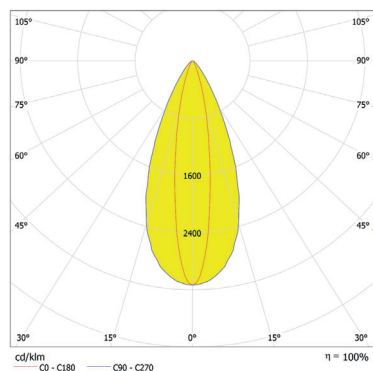

Distance [m]	Cone Diameter [m]	E(0°)	E(C90)	E(C0)	E(0°)
0.5	0.41	27287	22.2°	18921	9.0°
1.0	0.82	6822	22.2°	2730	9.0°
1.5	1.22	3822	22.2°	1213	9.0°
2.0	1.63	1705	22.2°	683	9.0°
2.5	2.04	1091	22.2°	437	9.0°
3.0	2.45	758	22.2°	303	9.0°


Total Luminous Flux: 2178lm

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 5547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:

ArcLine Outdoor Optic 36 CW - 15°

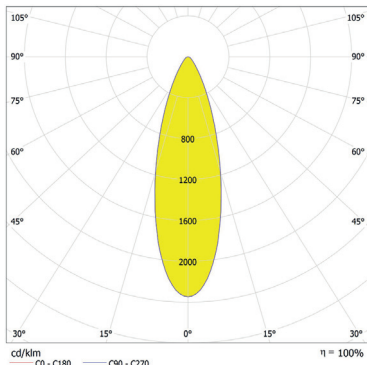


Distance [m]	Cone Diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.14	116608 7.7° 57373	
1.0	0.27	29152 7.7° 14343	
1.5	0.41	12956 7.7° 6375	
2.0	0.54	7288 7.7° 3586	
2.5	0.68	4664 7.7° 2295	
3.0	0.81	3239 7.7° 1594	

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 15.4°)

Total Luminous Flux: 3534lm

ArcLine Outdoor Optic 36 CW - 37°

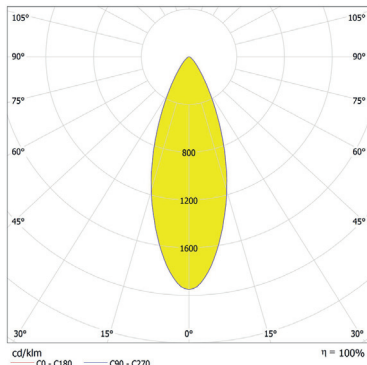


Distance [m]	Cone Diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.34	26303 18.6° 11211	
1.0	0.67	6576 18.6° 2803	
1.5	1.01	2923 18.6° 1246	
2.0	1.35	1644 18.6° 701	
2.5	1.68	1052 18.6° 448	
3.0	2.02	731 18.6° 311	

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 37.2°)

Total Luminous Flux: 3372lm

ArcLine Outdoor Optic 36 CW - 25°

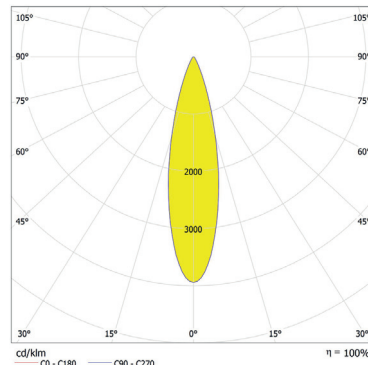


Distance [m]	Cone Diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.22	54065 12.5° 25358	
1.0	0.44	13516 12.5° 6339	
1.5	0.67	6007 12.5° 2818	
2.0	0.89	3379 12.5° 1585	
2.5	1.11	2163 12.5° 1014	
3.0	1.33	1502 12.5° 704	

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 25.0°)

Total Luminous Flux: 3480lm

ArcLine Outdoor Optic 36 CW - 44°x17°

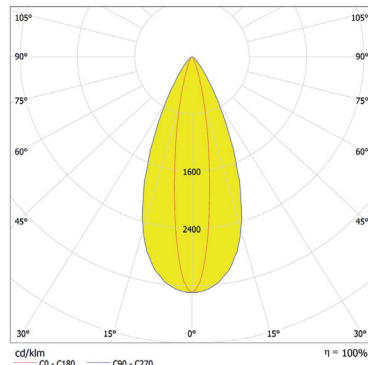


Distance [m]	Cone Diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.41	49852 22.1° 18324 8.5° 22380	
1.0	0.81	11463 22.1° 4581 8.5° 5597	
1.5	1.22	5895 22.1° 2036 8.5° 2488	
2.0	1.62	2866 22.1° 1145 8.5° 1399	
2.5	2.03	1834 22.1° 733 8.5° 896	
3.0	2.44	1274 22.1° 509 8.5° 622	

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 17.0°)
C90 - C270 (Half-value Angle: 44.2°)

Total Luminous Flux: 3480lm

For foot Candles divide lux by 10.7

ArcLine Outdoor Optic 36 CW - 31°

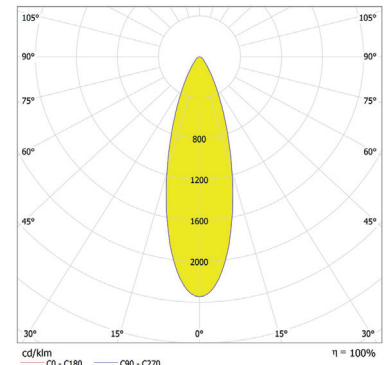

Distance [m]	Cone Diameter [m]	E(0°) E(C0)	E(0°) E(C0)
0.5	0.28	30799 15.6° 13862	
1.0	0.56	7700 15.6° 3465	
1.5	0.84	3422 15.6° 1540	
2.0	1.12	1925 15.6° 866	
2.5	1.40	1232 15.6° 554	
3.0	1.68	856 15.6° 385	

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 31.2°)


Total Luminous Flux: 3280lm

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E.mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:

ArcLine Outdoor Optic 36 WW - 16°

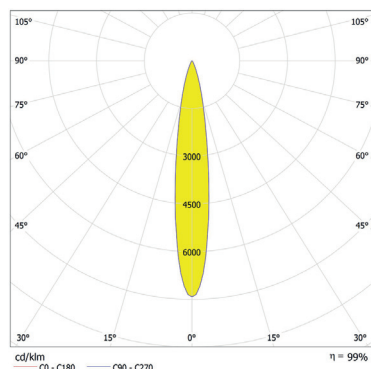


Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	Illuminance [lx]
0.5	0.14	101144	49713	
1.0	0.28	25286	12438	
1.5	0.42	11238	5524	
2.0	0.56	6321	3107	
2.5	0.70	4046	1969	
3.0	0.84	2810	1381	

Distance [m] Cone Diameter [m] Illuminance [lx]
 — CO - C180 (Half-value Angle: 16.0°)

Total Luminous Flux: 3408lm

ArcLine Outdoor Optic 36 WW - 25°

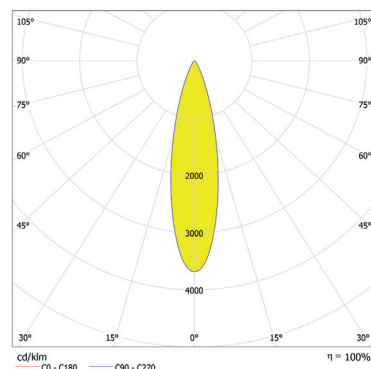


Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	Illuminance [lx]
0.5	0.23	47712	22181	
1.0	0.45	11928	5945	
1.5	0.68	5301	2465	
2.0	0.90	2882	1386	
2.5	1.13	1908	887	
3.0	1.35	1325	616	

Distance [m] Cone Diameter [m] Illuminance [lx]
 — CO - C180 (Half-value Angle: 25.4°)

Total Luminous Flux: 3240lm

For foot Candles divide lux by 10.7

ArcLine Outdoor Optic 36 WW - 28°

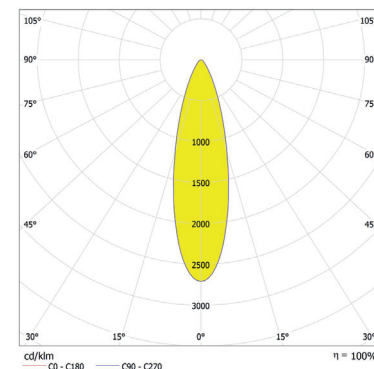


Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	Illuminance [lx]
0.5	0.25	34090	15593	
1.0	0.50	8523	3988	
1.5	0.75	3788	1733	
2.0	1.00	2131	975	
2.5	1.26	1364	624	
3.0	1.51	947	433	

Distance [m] Cone Diameter [m] Illuminance [lx]
 — CO - C180 (Half-value Angle: 28.2°)

Total Luminous Flux: 3146lm

ArcLine Outdoor Optic 36 WW - 35°

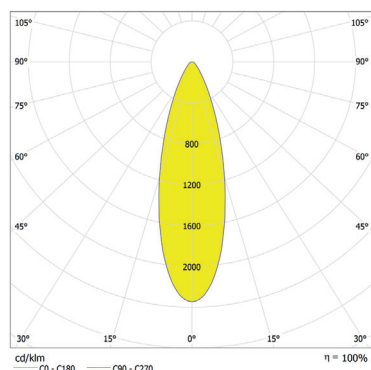


Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	Illuminance [lx]
0.5	0.31	28839	11738	
1.0	0.62	6710	2935	
1.5	0.93	2982	1304	
2.0	1.25	1677	734	
2.5	1.56	1074	470	
3.0	1.87	746	336	

Distance [m] Cone Diameter [m] Illuminance [lx]
 — CO - C180 (Half-value Angle: 34.6°)

Total Luminous Flux: 3224lm

ArcLine Outdoor Optic 36 WW - 45°x18°

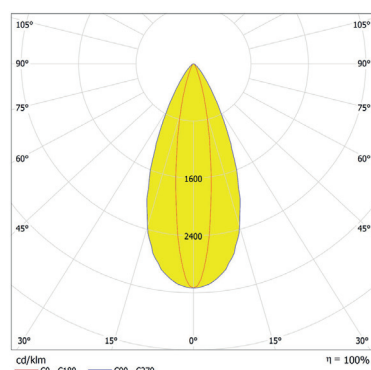

Distance [m]	Cone Diameter [m]	E(0°)	E(CO)	Illuminance [lx]
0.5	0.41	49943	18386	
1.0	0.82	10236	4097	
1.5	1.22	4549	1821	
2.0	1.63	2559	1024	
2.5	2.04	1638	655	
3.0	2.45	1137	455	

Distance [m] Cone Diameter [m] Illuminance [lx]
 — CO - C180 (Half-value Angle: 18.0°)
 — C90 - C270 (Half-value Angle: 44.4°)

Total Luminous Flux: 3268lm

ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.com.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: (954) 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com