

ArcPad Zoom 48MC tm



Client: _____

Project: _____


Specifier: _____

Type: _____ Qty: _____




FEATURES:

- Input Voltage: 100-277VAC 50/60Hz
- Power consumption: 200W
- Light Source: 12 x 15 Multi-Chip LED's
- Delivered Lumen: 2983 lm
- Projected LED Life: 60,000 Hrs
- Control: DMX Controller
- Housing: Cast Aluminium - Glass cover
- Fixing Method: Stirrup
- IP Rating: IP67
- Operating Ambient Temp: -20°C/+50°C (-4°F/+122°F)
- Certification: ETL / cETL, CE, RoHS
- 5 Year Warranty

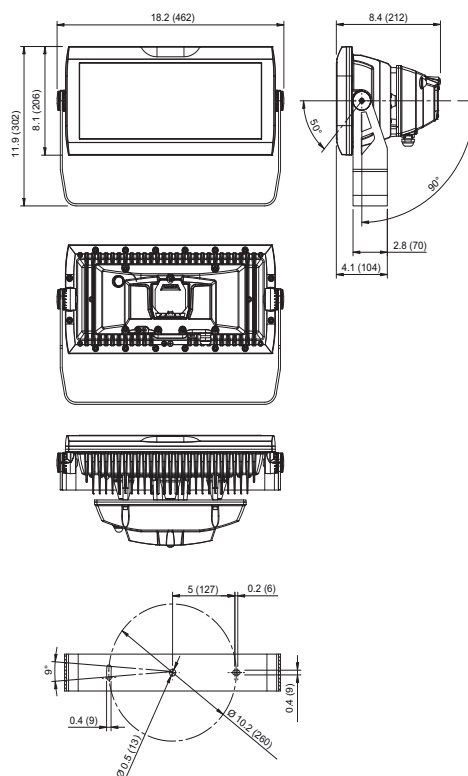

Connection Scheme:

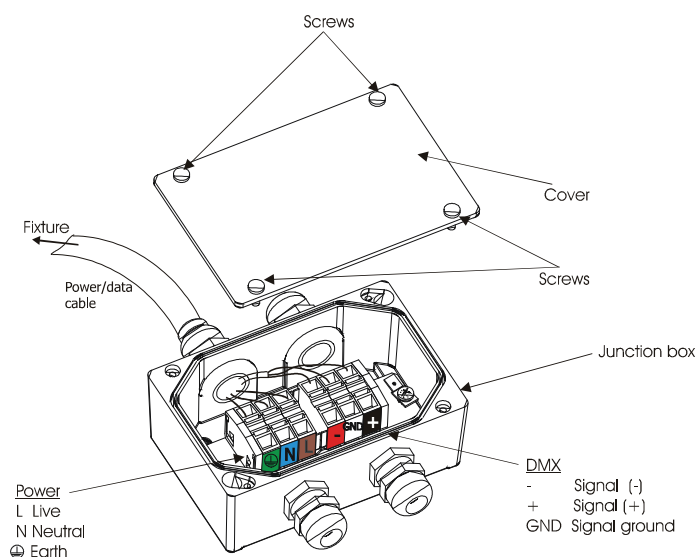

Accessories:



Mounting Plate



Top Hat

Product Specification:



Electrical	Input Voltage		100-277V AC 50/60 Hz
	Power Consumption		200W +/- 10%
	In Rush Current		TBC
Optical	Light Source		12 x 15W Multi -Chip LED's
		RGBW	CW - 6300K
		PW	6300K
		SW	2800K - 6300K
	LED Channels		Red / Green / Blue / White, Pure White, Smart White
	Beam Angle		Linear motorized Zoom 8° - 44°
Control	Projected Lumen Maintenance		60,000 hrs (L70@ 25°C / 77°F)
	Interface Protocol		USITT DMX512 RDM
	Wireless DMX (Optional Accessory)		Lumen Radio CRMX Technology
	Control System		Anolis Lighting Controls or any Third Party DMX512 Controllers
	Power Supply		Integral
Physical	Stand Alone Control		Yes
	Width x Height x Depth	Inches	18.25 x 11.9 x 8.4
		mm	463 x 301 x 212
	Weight	lbs	29.8
		kg	13.5
	Housing		High Pressure Die-Cast Aluminium Body Tempered Glass
	Fixture Cable and Connections		Li9YCHY - 3xAWG16+1 (2xAWG24) + Junction Box
	Fixing Method		Stirrup - Optional Floor Stand
	Adjustability		-50° / +90°
	IP Rating		IP67 (IP66 Junction Box)
	IK Rating		IK10
	Cooling System		Convection
Certification	Operating Ambient Temperature		-20°C / +50°C (-4°F / +122°F)
	Operating Temperature		+70°C @ Ambient +50°C (+158°F / +122°F)
	Listings		ETL / cETL, CE, RoHS

Subject to change without notice - please contact Anolis for clarification



Accessories	Description
    	

Photometric Data:

ArcPad Zoom 48MC - 8°

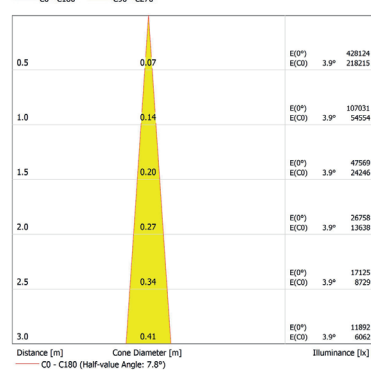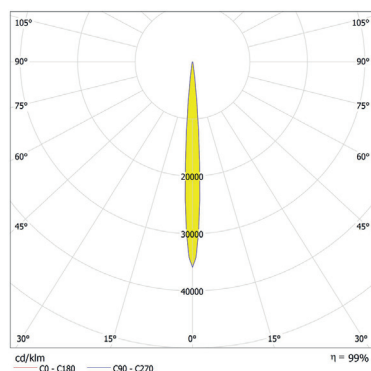

ArcPad Zoom 48MC - 26°

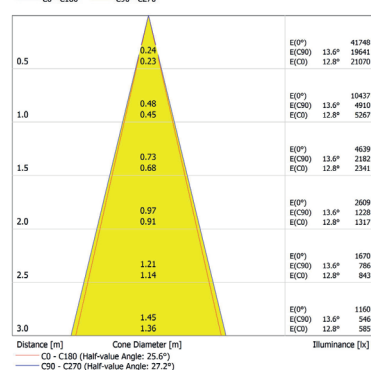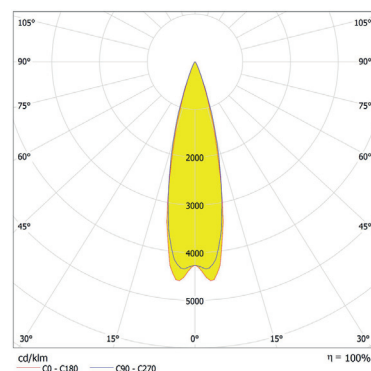

For foot Candles divide lux by 10.7

ArcPad Zoom 48MC - 44°

