

ArcPower 360 tm



Client: _____

Project: _____


Specifier: _____

Type: _____ Qty: _____



FEATURES:

- Input Voltage: 100-240V AC 50-60Hz
- Power consumption: 600W
- Max Load Per Zone:
 - 36 x 1W LED's (RGB)
 - 42 x 1W LED's (RGBW)
 - 10 LED's RGBW (MC)
- Control: DMX 512, USITT
- Housing: Steel Plate
- Max Cable Length: 80m
- Fixing Method: 6 x Fixing holes
- IP Rating: IP2X
- Operating Ambient Temp: +40°C (+104°F)
- Certification: [ETL / cETL Not Smart White], CE, RoHS
- 5 Year Warranty

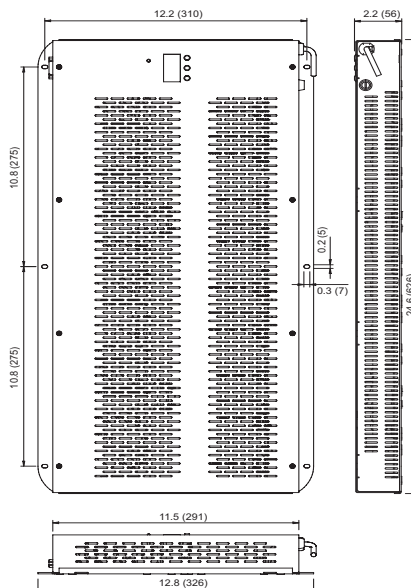

Product Specification:

Electrical	Input Voltage		100-240V AC 50/60 Hz
	Power Consumption		600W +/-10%
	Max Output Current		350mA Per Colour
Control	Interface Protocol		USITT, DMX512, DyNet, RS232
	Operation Modes		DMX, Master/ Slave, Stand-Alone
	Display		3 Digit LED
Physical	Width x Height x Depth	Inches	12.9 x 2.17 x 24.65
		mm	326 x 55 x 626
	Weight	lbs	13.9
		kg	6.3
	Number of Led Output Zones		10
	Maximum Load Per Zone	RGB	36 x 1W LED's (Smart White 36 x 1W LED's)
		RGBW	42 x 1W LED's
		RGBW (MC)	10 x MC LED's (Smart White 10 x MC LED's)
	Total Load	RGB	360 x 1W LED's (Smart White 360 x 1W LED's)
		RGBW	420 x 1W LED's
		RGBW (MC)	100 x MC LED's (Smart White 100 x MC LED's)
	DMX Channels		30, 40, 43, 4, 5, 1, 5 (Smart White 20, 1, 11, 22)
	DMX Modes		6 (Smart White 4)
	Built in Programs		2 (Smart White 3)
	Editable Programs		3 (Upto 30 Steps Each) (Smart White 1 Upto 30 Steps)
	Max Cable Length		80m Max Per Zone
	LED Output Connection		RJ45
	DMX Connection		RJ45
	RS232 Connection		DE-9 (Male)
	Fixing Method		6 Mounting Holes
IP Rating		IP2X	
IK Rating		N/A	
Cooling System		Convection	
Operating Temperature Range		-10°C / +40°C (14°F / +104°F)	
Certification	Listings		ETL / cETL (Not Smart White), CE, RoHS

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Cable Joiner (included)
	RJ45 / DMX 3 Pin Adaptor (Included)
	RJ45 / DMX 5 Pin Adaptor (Included)

