

ArcSource 140 COB Recessed TM



Client: _____

Project: _____

Specifier: _____




Type: _____ Qty: _____






FEATURES:

- Input Voltage: 48V DC
- Power consumption: 140W
- Light Source: 130W COB LED
- Delivered Lumen: TBC
- Projected LED Life: 60,000
- Control: ArcPower 140 COB
- Housing: Precision Turned Aluminium
- Mounting Method: Mounting Trim Kit
- IP Rating: IP2X
- Operating Ambient Temp: -20°C/+40°C (-4°F/+104°F)
- Certification: ETL / cETL, CE, RoHS
- 5 Year Warranty


Fixture

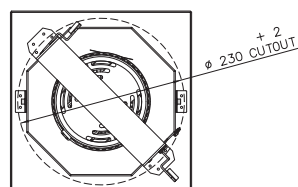

Trim Kit

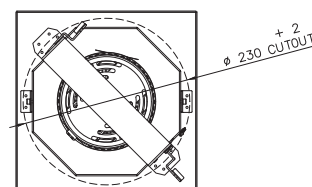

Connection Scheme:

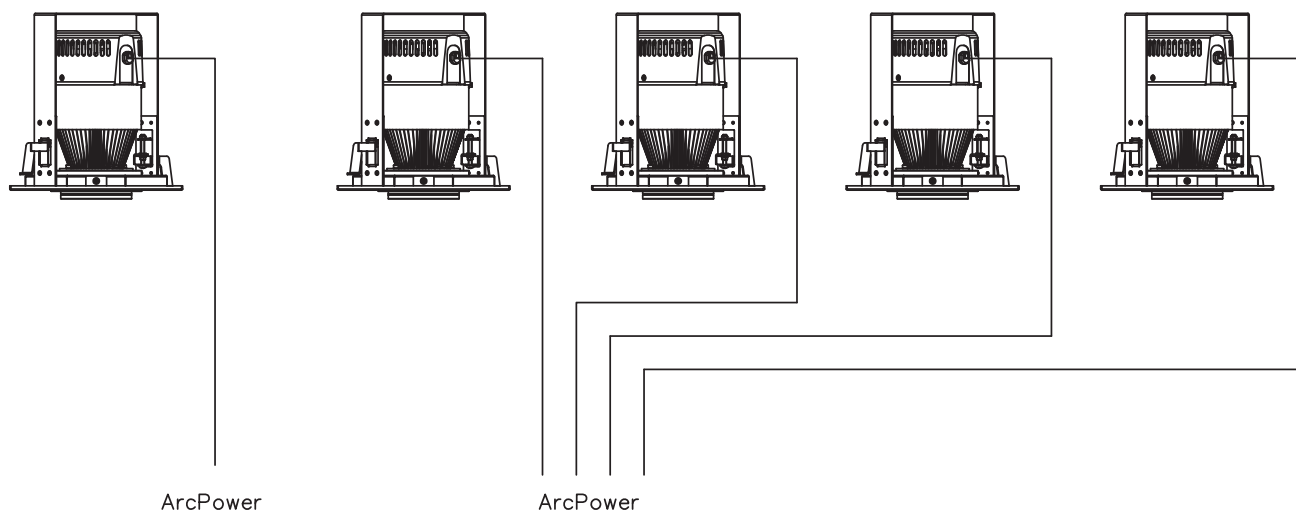

Product Specification:

Electrical	Input Voltage		48V		
	Power Consumption		140W +/- 10%		
Optical	Light Source		130W COB LED		
			2700K or 6000K		
	LED Channels		Pure White		
	Beam Angle		23° , 33° + Optional Diffuser		
	CRI		82 (6000K)		
	Projected Lumen Maintenance		60,000 hrs (L70@ 25°C / 77°F)		
Control	Wireless DMX (Optional Accessory)		N/A		
	Control System		ArcPower 140 COB		
	Power Supply		ArcPower 140 COB		
	Stand Alone Control		No		
Physical	Width x Height x Depth		Inches	9.84, 8.86, 9.84 Including Trim	
			mm	250, 225, 250 Including Trim	
	Weight		LED Module	Trim	
			lbs	5.5	3.3
			kg	2.5	1.5
	Housing		Precision Turned Alluminium Glass Cover		
	Fixture Cables and Connections		Li9Y11Y - 2xAWG16+1xAWG20, Chogori 3-Pin Connector		
	Fixing Method		Mounting Trim Kit		
	Adjustability		Tilt 15°		
	IP Rating		IP2X		
	Cooling System		Silent Cooling Fan		
	Operating Ambient Temperature		-20°C / +40°C (-4°F / +104°F)		
	Operating Temperature		TBC		
	Listings		ETL / cETL, CE, RoHS		
Certification					

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Mounting Trim Kit (Included)
	Anti-Glare Louvre (Optional)
	Diffuser 28° (Optional)
	Diffuser 40° (Optional)
	Diffuser 50° (Optional)
	Diffuser Holder (Optional)

