

# ArcSource Outdoor 16MC Pixel™



Client: \_\_\_\_\_

Project: \_\_\_\_\_


Specifier: \_\_\_\_\_

Type: \_\_\_\_\_ Qty: \_\_\_\_\_




**FEATURES:**


- Input Voltage: 48VDC
- Power consumption: 36W @ 700mA
- Light Source: 4 x 15W MC LED's
- Delivered Lumen: 1951lm 11dg 24MC - 700mA (TBC)
- Projected LED Life: 60,000 Hrs
- Control: DMX Controller
- Housing: Die-Cast Aluminium and Glass Cover
- Mounting Method: Yoke + Floor Stand
- IP Rating: IP67
- Operating Ambient Temp: -20°C/+40°C (-4°F/+104°F)
- Certification: ETL / cETL, CE, RoHS
- 5 Year Warranty

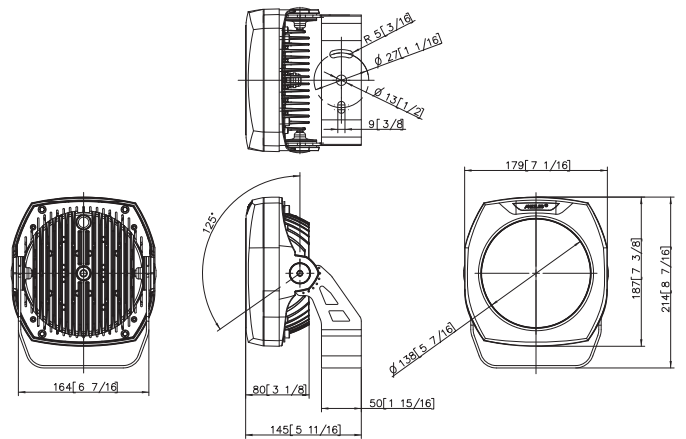

## Connection Scheme:

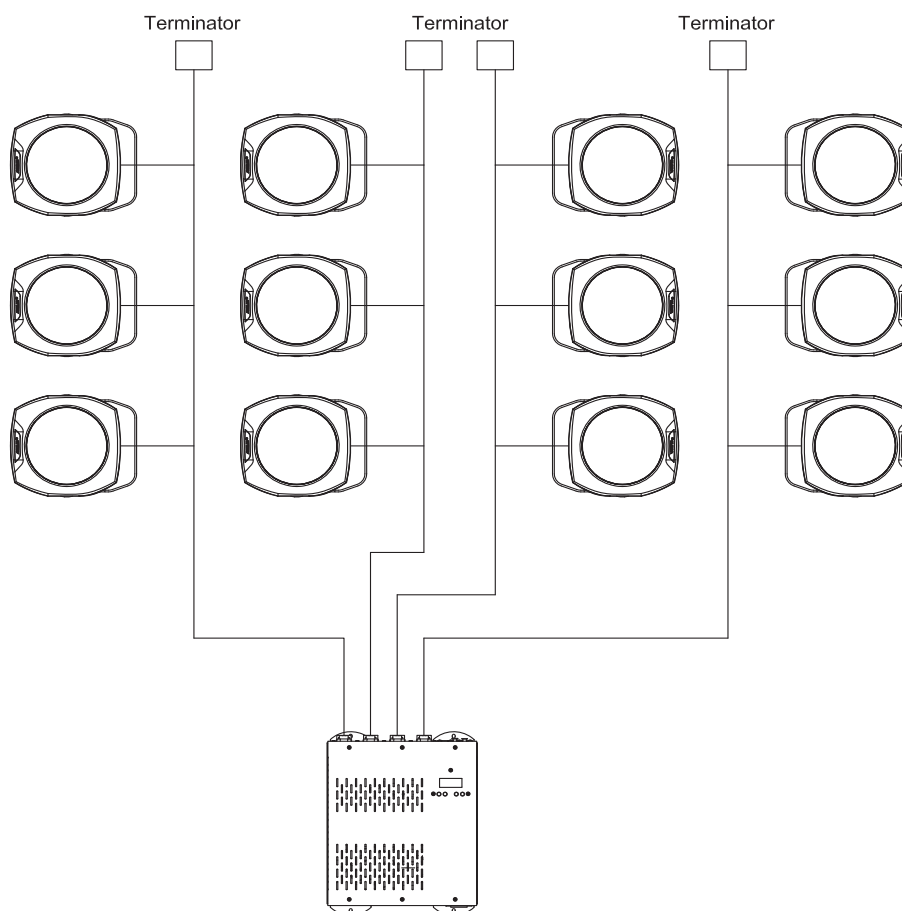

Adapter cable Chogori -Chogori (it is not a standard part of delivery)

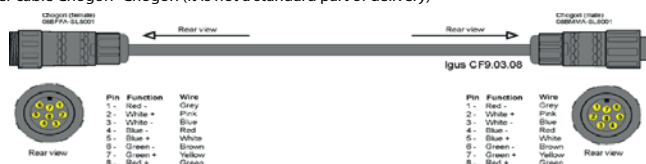

Product Specification:

Electrical	Input Voltage		48V DC
	Power Consumption		36W
Optical	Light Source		4 x 15W Multi-Chip LEDs
		RGBW	W= CW - 6300K
		RGBA	
		SW	2700K-7100K
		PW	6300K
	LED Channels		Red, Green, Blue, White, Pure White, Smart White
Beam Angle		7°, 24°, 34°, 7°x42°, 42°x7°	
Projected Lumen Maintenance		50,000 hrs ( L70@ 25°C / 77°F)	
Control	Wireless DMX (Optional Accessory)		N/A
	Control System		ArcPixel Power
	Power Supply		ArcPixel Power
	Stand Alone Control		N/A
Physical	Width x Height x Depth	Inches	7.2 x 8.43 x 5.71
		mm	182 x 214 x 145
	Weight	lbs	5.5
		kg	2.5
	Housing		High Pressure Die-Cast Aluminium Body Tempered Glass
	Fixture Cable and Connections		LIYY 8xAWG22 - 0.5m Long (1.64ft) - Chogori IP68 Connector
	Fixing Method		Stirrup / Floor Stand Optional
	Adjustability		+35 / -90°
	IP Rating		IP67
	IK Rating		IK06
	Cooling System		Convection
	Operating Ambient Temperature		-20°C / +45°C (-4°F / +113°F )
	Operating Temperature		+65°C @ Ambient +40°C (+149°F @ Ambient +104°F )
	Certification	Listings	

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Top Hat (Optional)
	Half top Hat (Optional)
	Floor Stand (Optional)

