

ARCSOURCE™ 4MC II

Offering spectacular performance and seamless colour mixing within a small package, the ArcSource 4MC II is perfect for a broad range of interior applications. Advanced cooling and driver technology have been integrated into the fixture to deliver maximum light output without sacrificing LED longevity or increasing energy consumption making ArcSource 4MC II a versatile architectural fixture.



KEY FEATURES

Homogenised colour mixing or fixed white from a discrete, recessed, bright luminaire.

Lumen Output & Light Source

Max. 242 lm | 1 X Multichip

Projected Lumen Maintenance

60,000 hrs (L70@25°C)

Power Consumption

Typ. 5W (350mA)

Physical (max WxHxD)

ø72 x 103mm - 0.3kg | ø2.83 x 4.06 in. - 0.66lbs | Aluminium Body, Tempered Glass

CONTROL & PROTOCOLS



STANDARD & SPECIFICATION



2 Year
Warranty

5 Year
Warranty
(Registered)

COLOURS



RGBW



Pure
White

COLOUR TEMPERATURES



3.000 K

FINISH OPTIONS



Graphite
Black



Silver



Custom
Paint Colour

OPTIC OPTIONS

SYMMETRICAL



10°



15°



20°



30°



40°



60°



90°

BI-SYMMETRICAL



10x30°



10x60°



15x90°



35x70°



30x10°



60x10°



90x15°



70x35°

ARCSource OUTDOOR 4MC PIXEL SPECIFICATION

ELECTRICAL	Typical Power Consumption	5 W
	Max. Input Current	350 mA (per channel)
OPTICAL	Light Source	1 x High Power Multichip LED
	Colour Variants	RGBW (W - 6500 K), PW (W - 3000 K)
	Beam Angle	Symmetrical 10° 15° 20° 30° 40° 60° 90°
		Bi-symmetrical 10° x 30° 30° x 10° 10° x 60° 60° x 10° 35° x 70° 70° x 35° 15° x 90° 90° x 15°
	Lumen Output Delivered	242 lm (RGBW @ 10°, all LEDs on full, 350 mA)
Projected Lumen Maintenance	60.000 hrs (L70 @ 25 °C / 77 °F)	
CONTROL	Power Supply	ArcPower range
PHYSICAL	Width x Height x Depth	Ø72 x 103 mm Ø 2.83 x 4.06 in.
	Weight	0.3 kg 0.66 lbs
	Housing	Precision Turned Aluminium
	Finish Options	Standard Colour - Graphite Black (RAL 9011), White (RAL 9016)
		Cost Option - Custom RAL
	Cables / Connections	24 AWG x 4P CAT 5 - 1.5 m (4.29 ft) - RJ45
	Mounting Method	MR16 Trim with Spring Clip (Included)
	Protection Factor	IP2X
	Cooling System	Convection
	Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)
Operating Temperature	+58 °C @ Ambient +40 °C (+136 °F @ Ambient +104 °F)	
CERTIFICATION	Listings	ETL / cETL, CE, RoHS
ACCESSORIES		Cable splitter 1 to 2, RJ45 (included)



PHOTOMETRIC OVERVIEW

Lumen Output (lm)



	RGBCW (W 6500 K)	RGBA	WW (3000 K)
10°	242	214	242
15°	244	215	244
20°	238	210	238
30°	236	208	236
40°	234	206	234
60°	220	194	220
90°	193	170	193
10° x 30°	263	232	263
10° x 60°	223	197	223
15° x 90°	202	178	202
35° x 70°	254	224	254

PHOTOMETRIC DATA



ArcSource 4MC II RGBCW 10dg





ArcSource 4MC II RGBCW 15dg





ArcSource 4MC II RGBCW 20dg





ArcSource 4MC II RGBCW 30dg

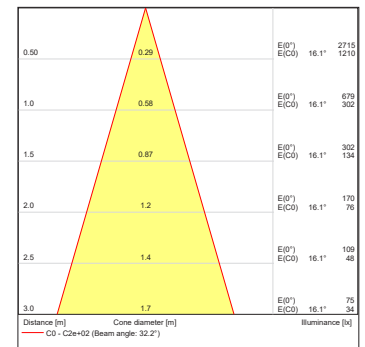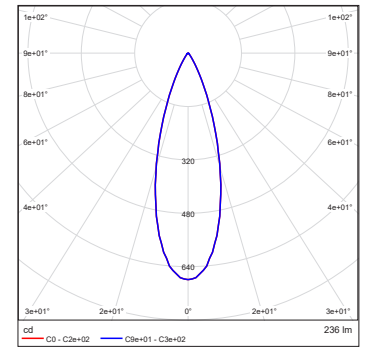



ArcSource 4MC II RGBCW 40dg



ArcSource 4MC II RGBCW 60dg




ArcSource 4MC II RGBCW 90dg




PHOTOMETRIC DATA


ArcSource 4MC II RGBCW
10dg x 30dg








ArcSource 4MC II RGBCW
10dg x 60dg



ArcSource 4MC II RGBCW
15dg x 90dg




ArcSource 4MC II RGBCW
35dg x 70dg

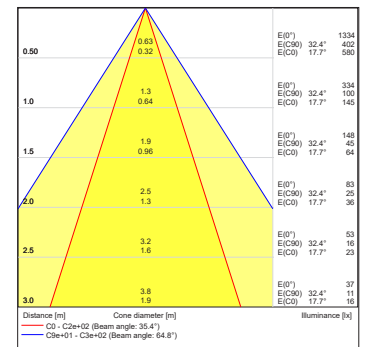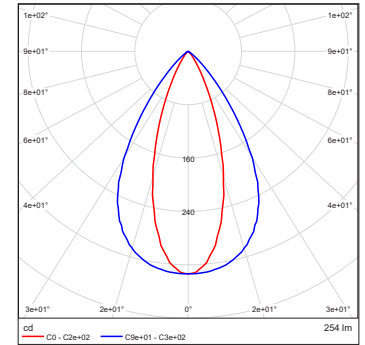

BI-SYMMETRICAL BEAM ANGLES

Bi-symmetrical: 10°x30°, 10°x60°, 35°x70°, 15°x90°

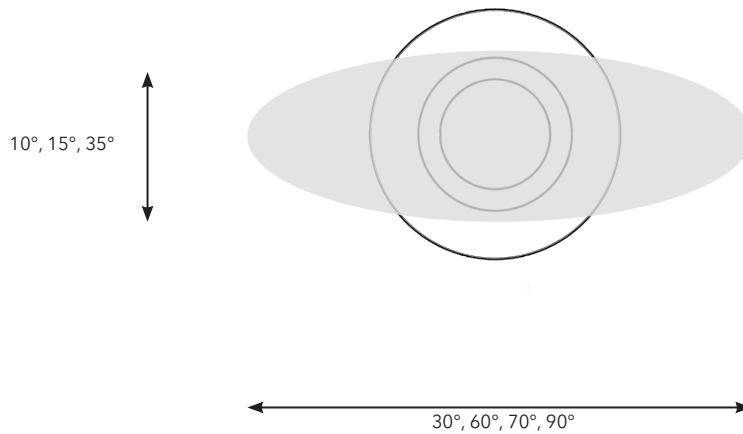

Note: Horizontal or vertical beam angles of this fixture depends on position and rotation of the mounting.

DIMENSIONS

