

AMBIANE™ XP56 PENDANT REMOTE

A significant part of architectural lighting, without any doubts, is retrofitting of installations. In reaction to this fact, Anolis has enriched the Ambiane series and offers a new LED pendant version with remote power supply. Using three adjustable wires which allow installers to set an ideal horizontal position of the fixture according to the optical and design requirements, the Ambiane XP56 Pendant Remote power supply uses the existing electrical circuits. Specifically designed for large theatres, concert halls, auditoriums, houses of worship and hotel foyers that require both general ambient light and the ability to control the visual experience, the Ambiane XP56 Pendant is an ideal, stylish solution. Optically, this high-performance RGBW luminaire delivers in excess of 10,000 lm and is perfect for setting the mood via its extremely smooth colour mixing capabilities. Available in 20, 30, 45 or 60-degree beam spreads, Ambiane XP56 Pendant Remote provides perfect coverage of any area. The incorporation of our L3 (Low Light Linearity) dimming system allows seamless fades to black even when mixed with traditional sources. With no UV or IR emissions which make it optimal for museums as well, the fixture is easily controlled via DMX or DALI and is RDM compatible.



KEY FEATURES

LED Output

Available in a wide range of colour configurations (RGBW, PW, TW, TD), the Ambiane XP56 Pendant Remote utilises a high-efficiency LED engine reaching 42 lm/W efficiency. With CRI 90+, you can always see every colour without colouring distortion. The lifetime over 90,000 hours, provided by its high-quality LED modules, guarantees low maintenance cost and a long-lasting light output. Offering many different beam spreads (20°, 30°, 45° and 60°), you can precisely define light output, required in a lighting installation.

Control

Thanks to our unique L3 (low light linearity) 18-bit dimming system, exceptionally smooth fade to black and colour mixing are now possible. The fixture's remote setting and device management is realised through DALI and DMX512 control protocols with RDM support.

Installation

Fixture is mounted by one hanging wire and three adjustable wires for desired position and length. Power supply is hidden in false ceiling, which allows the fixture to be easily mounted onto slope ceiling. The low 48 V DC input voltage secures a safe light operation with the possibility of a backup power connection to protect against any unexpected blackout.


COLOURS




CONTROL & PROTOCOLS




STANDARD & SPECIFICATION

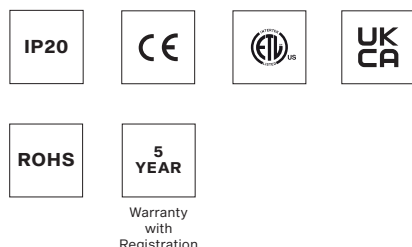

COLOUR TEMPERATURE



OPTIC OPTIONS



FINISH OPTIONS




SPECIFICATION SHEET
AMBIANE XP56 PENDANT REMOTE



AMBIANE XP56 PENDANT REMOTE SPECIFICATION


ELECTRICAL	Nominal Input Voltage	48 V DC				
	Input Voltage Range	44 - 50 V DC				
	Typical Power Consumption	150 W + / - 10 %				
OPTICAL	Light Source	High Power LED module				
	Colour Variants	RGBW (W - 2700K or 4000K) PureWhite Tunable White Tungsten Dim				
	Colour Temperature of White	PW 2700 K or 4000K TW 2700 - 4000K TD 3200 K				
	CRI	90+				
	Beam Angle	20° 30° 45° 60°				
	Lumen Output Delivered	7.344 lm (RGBNW @ 20° 4000K)				
		8.707 lm (RGBNW @ 30° 4000K)				
		8.865 lm (RGBNW @ 45° 4000K)				
		10.107 lm (RGBNW @ 60° 4000K)				
Projected Lumen Maintenance	L90B10 >90.000 hrs, Ta = 25°C / 77°F					
CONTROL	Interface Protocol	USITT DMX512, RDM, DALI 2, 0-10V				
	DALI 2 DeviceType	DT 8				
	Control System	ArcControl Range or any Third Party Controller				
	DMX Modes	5 (for RGBW version)				
	DMX Channels	4, 3, 12, 3, 6				
	Setting / Addressing	DIP Switch				
	Power Supply	Ambiane XP56 Pendant Remote: Ambiane Power XP, Ambiane Power Rack or Third Party Constant Voltage 48 V / 150 W Power Supply				
		Ambiane XP56 Pendant Remote US: Ambiane Power XP, Ambiane Power Rack US or Third Party Constant Voltage 48 V / 150 W Power Supply				
PHYSICAL	Width x Height x Length	Ambiane XP56 Pendant Remote 20°		ø202 x 455 mm (ø7.95 x 17.91 in.)		
		Ambiane XP56 Pendant Remote 30°		ø202 x 455 mm (ø7.95 x 17.91 in.)		
		Ambiane XP56 Pendant Remote 45°		ø202 x 430 mm (ø7.95 x 16.93 in.)		
		Ambiane XP56 Pendant Remote 60°		ø202 x 400 mm (ø7.95 x 15.75 in.)		
		Connection Terminal		176 x 59 x 28 mm (6.93 x 2.32 x 1.10 in.)		
	Weight	9.3 kg 20.5 lbs		9.3 kg 20.5 lbs	9 kg 19.84 lbs	8.9 kg 19.62 lbs
	Housing	High Pressure Extruded Aluminium Body, Metal cover				
	Finish Options	Standard Color - Black RAL9005 White RAL9016 Graphite Black RAL9011				
		Cost Option - Custom RAL				
	Cables / Connections	Terminal Block (Power In, DMX In/Out, DALI In/Out, Secondary Power)				
	Mounting Method	Pendant with 1 adjustable hanging wire: Standard: 2.5 m (possibility of shorten on site) Other Lengths: Upon Request (more than 2.5 m)				
	Protection Factor	IP20				
	Cooling System	Convection				
	Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)				
Operating Temperature	+75 °C @ Ambient +40 °C (167 °F @ Ambient 104 °F)					
CERTIFICATION	Listings	ETL / cETL, CE, RoHS , UKCA				
ACCESSORIES	Not Included Items					
	Power Supply Options	Ambiane Power XP (MeanWell ELG-240-48-3Y)				
		Ambiane Power Rack (CE / US)				

DIMENSIONS

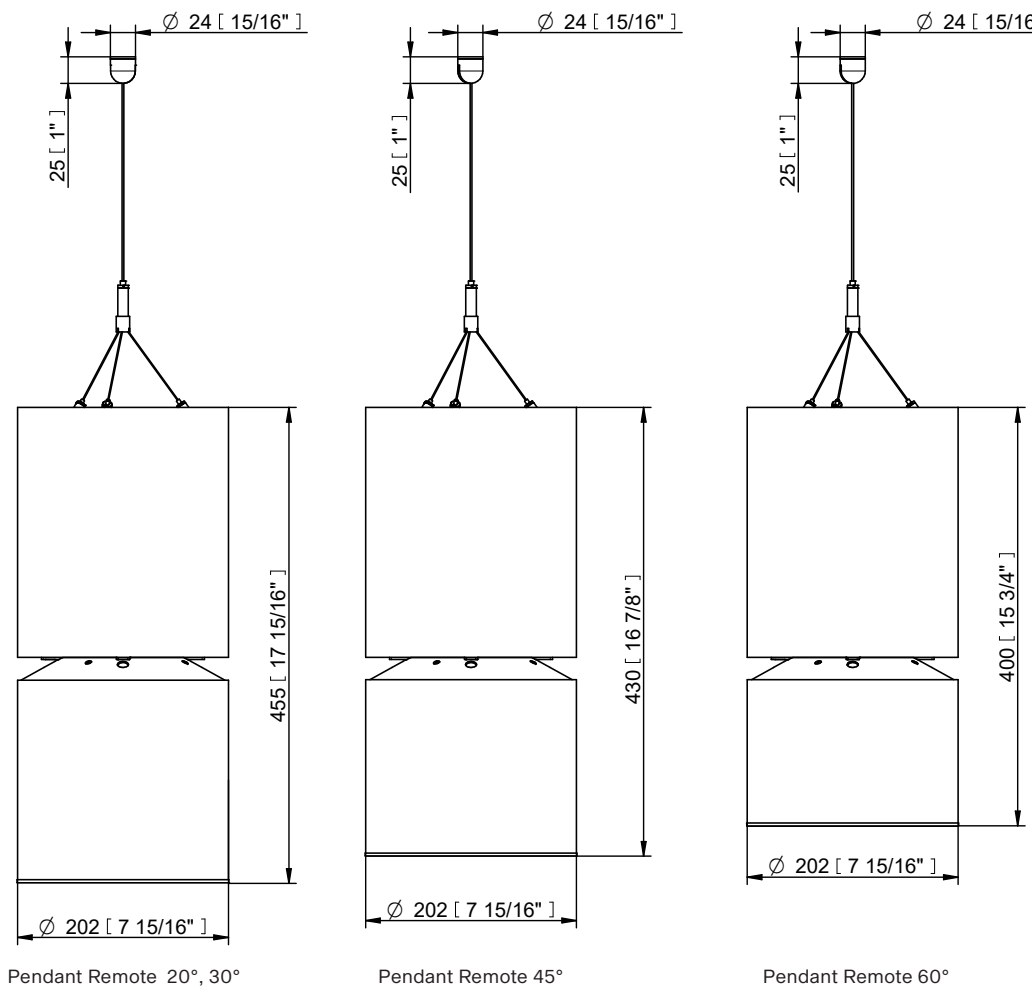

Fixture has possibility to be mounted on sloped ceiling.

Possible angle: +90° / -90°

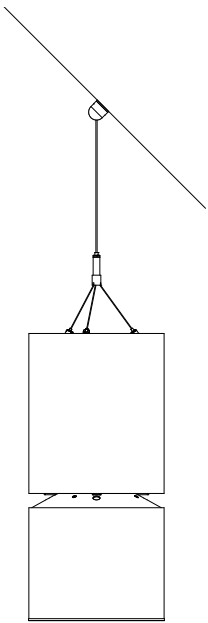

AMBIANE POWER RACK (CE / US) SPECIFICATION

ELECTRICAL	Input Voltage	100 – 240 V AC 50/60 Hz (Ambiane Power Rack)
		100 – 277 V AC 50/60 Hz (Ambiane Power Rack US)
	Maximal Power Consumption	1350 W
	Output Voltage	48 V DC
	Outputs	8
	Max. Load per output	200 W
	Max. Total Load	1200 W
PHYSICAL	Length x Height x Depth	484 / 432 x 88 x 241 / 202 mm (19.05 / 17 x 3.46 x 9.48 / 7.95 in.)
	Weight	5.4 kg 11.9lbs
	Housing	Rack Standard - 2U or Wall Mounted Brackets
	Finish Options	Standard Colour - Graphite Black (RAL 9011) Silver (RAL9006)
		Cost Option - Custom RAL
	Cables / Connections	8 x Terminal Block (DC power Out)
		1x Main Power Cord (w/plug; CE/US)
	Mounting Method	Designed to Rack Box Installation
	Protection Factor	IP20 / Dry locations only
	Cooling System	Fan Cooled
	Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)
CERTIFICATION	Listings	ETL / cETL, CE, RoHS , UKCA





DIAMETER OF CONDUCTORS

Recommended diameters of conductors with respect to distance between Fixture and Power supply.

Distance / Cable lenght	15m	30m	45m	60m	75m
Diameters of conductors	0.5mm²	1mm²	1.5mm²	2mm²	2.5mm²

AMBIANE POWER RACK DIMENSIONS

Ambiane Power Rack (CE / US)

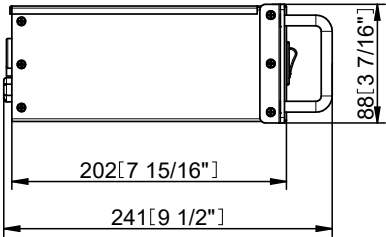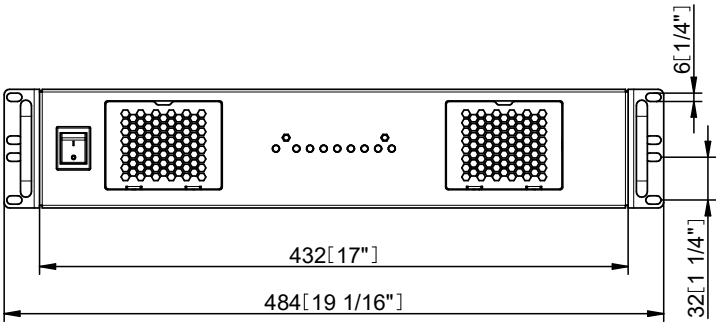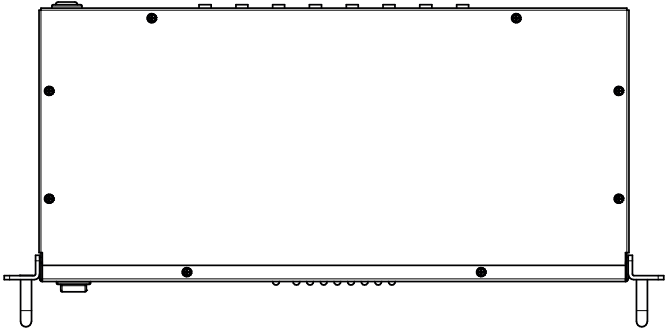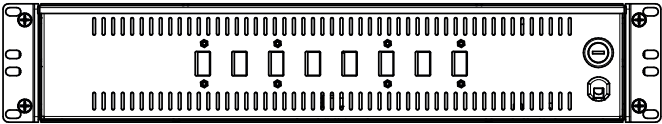

PHOTOMETRIC OVERVIEW

Based on data for Ambiane XP56 Recessed

Lumen Output (lm)						
	RGBWW (2700 K)	RGBNW (4000 K)	PW (4000 K)	PW (2700 K)	TW (2700 K - 4000 K)	TD (3200 K)
20°	5 472	7 344	9 432	7 530	5 472 - 7 344	7 401
30°	6 487	8 707	11 182	8 929	6 487 - 8 707	8 774
45°	6 606	8 865	11 386	9 091	6 606 - 8 865	8 935
60°	7 531	10 107	12 981	10 364	7 531 - 10 107	10 186



UNIFIED GLARE RATING (UGR)

UGR	
20°	< 9 UGR
30°	< 10 UGR
45°	< 16 UGR
60°	< 22 UGR



TM30 FOR AMBIANE XP56 RECESSED

NOTE: This is a recommended method for displaying ANSI/IES TM-30-18 information.

RGBWW VERSION

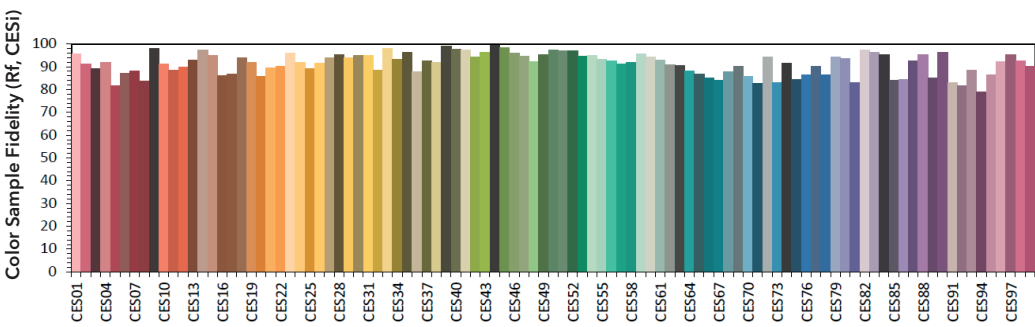
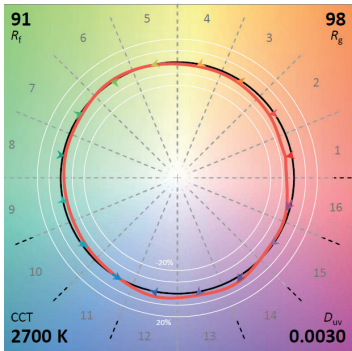


RGBNW VERSION

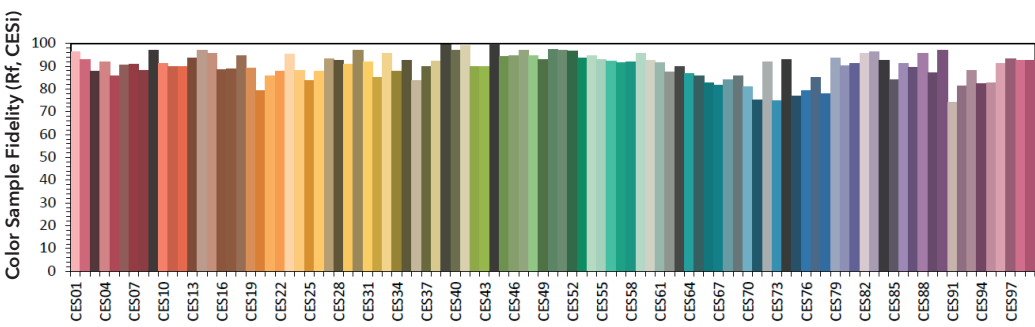



PHOTOMETRIC DATA



Ambiane XP56 RGBWW 20dg





Ambiane XP56 RGBWW 30dg





Ambiane XP56 RGBWW 45dg





Ambiane XP56 RGBWW 60dg





Ambiane XP56 RGBNW 20dg



Ambiane XP56 RGBNW 30dg



Ambiane XP56 RGBNW 45dg



Ambiane XP56 RGBNW 60dg

