

## EMINERE® INGROUND 1 / 2 / 4 MC

Eminere Inground MC is a robust luminaire designed to be installed into the ground. A stainless steel installation sleeve provides rust protection as well as "armour" for the Eminere fixture itself. Overall, Eminere Inground MC comes with an IP67 protection factor, standard or Anti-skid glass, and as always, perfect colour mixing. With  $\pm 15^\circ$  tilt adjustment, precision optics with wide range of beam angles and colour variants, in-ground version of the Eminere MC luminaire is great choice for an exterior applications such as flood lighting, wall grazing, wall washing and accent lighting.



### KEY FEATURES

#### Application

Anti-skid glass option for pedestrian areas application. Easy to install into soft and hard ground.

#### Light Source

Full spectral LEDs selection with custom option on request. Output up to 1876 lm for Eminere Inground 2 MC (@12°, RGB-CW). Long LED lifetime over 90,000 hrs. Manually adjustable tilt 0° - 15° for fine adjustment of light beam.

#### Durability

High durability with ingress factor of IP67 and walkover housing for highest durability requirements.

### COLOURS

\* UPON REQUEST



RGBW



RGBA



Pure White



Tuneable White \*

### COLOUR TEMPERATURE

\* UPON REQUEST



3.000 K



3.000 K - 6.500 K \*

### CONTROL & PROTOCOLS



OPTIONAL



OPTIONAL

### OPTIC OPTIONS

#### SYMMETRICAL



12°



15°



25°



30°



45°



65°



100°

#### BI-SYMMETRICAL



10°x30°



10°x60°



15°x45°



15°x90°



35°x60°



30°x90°

### STANDARD & SPECIFICATION



IP67



IK10



CE



ETL



ROHS



UK CA



5 YEAR

Warranty with Registration



Vibration Standard for Bridge

### FINISH OPTIONS

\* CLOSEST RAL TONE  
\* HE = Harsh Environment



Graphite Black RAL 9011\*



HE Graphite Black RAL 9011\*

### SLEEVE & COVER PLATES



Stainless Steel

**SPECIFICATION**

<b>ELECTRICAL</b>	Input Voltage	120–277 V AC 50/60 Hz		
	Typical Power Consumption	<b>Eminere Inground 1:</b> 30 W	<b>Eminere Inground 2:</b> 50 W	<b>Eminere Inground 4:</b> 90 W
<b>OPTICAL</b>	Light Source	High Power Multi Chip LEDs		
	Colour Variants	RGBW (W - 6.500 K)	RGBA	PW (W - 3.000 K)
		Other Variants On Request (TW 3000–6500 K)		
	Beam Angle	Symmetrical	Clear Glass: 12°   15°   25°   35°   45°   65°   100°	
			Anti-Skid: 18°   22°   35°   50°   65°   100° <b>PRELIMINARY</b>	
		Bi-symmetrical	Clear Glass: 10°x30°   10°x60°   15°x45°   15°x90°   35°x60°   30°x90°	
			Anti-Skid: 20°x35°   20°x65°   20°x90°   40°x70° <b>PRELIMINARY</b>	
	Lumen Output Delivered	Asymmetrical	Wallwasher	
		<b>Eminere Inground 1 MC</b>	938 lm, (12°, @RGBCW, Clear Glass)   1.011 lm, RGBW @ 18° (Anti-Skid) <b>PRELIMINARY</b>	
		<b>Eminere Inground 2 MC</b>	1876 lm, (12°, @RGBCW, Clear Glass)   2.021 lm, RGBW @ 18° (Anti-Skid) <b>PRELIMINARY</b>	
Projected Lumen Maintenance	<b>Eminere Inground 4 MC</b>	3752 lm, (12°, @RGBCW, Clear Glass)   4.042 lm, RGBW @ 18° (Anti-Skid) <b>PRELIMINARY</b>		
	L90B10 >90.000 hrs, Ta = 25°C / 77°F			
<b>CONTROL</b>	Interface Protocol	Via E-Box range or Wireless DMX   NFC		
	E-Box Control Protocols	USITT DMX512, RDM, ArtNet, MA Net, MA Net2, sACN, Kling-Net		
	Wireless DMX (Option)	Lumen Radio CRMX Technology		
	Setting / Addressing	Via Two Row LCD Display with Control Buttons or RDM communicator   NFC (Stand-alone)		
	Power Supply	Integrated		
	Connectivity	E-box Lite	Max. 32 pcs of Eminere Inground 1/ 2 / 4 MC	
<b>PHYSICAL</b>	Width x Height x Length	Eminere Inground 1 / 2 / 4:	186 x 228 x 407 / 707 / 1307 mm (7.32 x 8.98 x 16.02 / 27.83 / 51.46 in.)	
	Weight	<b>12.8 kg / 28.2 lbs</b>	(8.5 kg / 18.7 lbs <b>Eminere Inground 1 MC Fixture</b> , (5.5 kg / 12.1 lbs <b>Install. Sleeve</b> )	
		<b>19.6 kg / 43.2 lbs</b>	(12 kg / 26.4 lbs <b>Eminere Inground 2 MC Fixture</b> , 9.5 kg / 20.9 lbs <b>Install. Sleeve</b> )	
		<b>35.4 kg / 78.1 lbs</b>	(21 kg / 46.2 lbs <b>Eminere Inground 4 MC Fixture</b> , 18.7 kg / 41.1 lbs <b>Install. Sleeve</b> )	
	Housing	High Pressure Extruded Aluminium Body   End Caps - Die-Cast Aluminium   Tempered Glass		
		Anti-Skid (Option)   Stainless Steel Installation sleeve for pre-installation		
	Finish Options	Fixture	Graphite Black RAL 9011   Harsh Environment Graphite Black RAL 9011 (Cost option)	
		Sleeve & Cover Plates	Stainless Steel	
	Connections	Junction Box		
	Mounting Method	Inground mount		
Adjustability	Tilt 0°–15° (except Wallwasher version)			
Protection Factor (IP   IK)	IP67 / Suitable For Wet Locations	IK10		
Max. Static Load	Standard Tempered Glass: 45kN	Anti-Skid Tempered Glass: 23kN		
Cooling System	Convection			
Operating Ambient Temperature	-20°C / +50°C (-4°F / +122°F)			
Operating Temperature	+80°C @ Ambient +40°C (+176°F @ Ambient +104°F)			
<b>CERTIFICATION</b>	Listings	ETL / cETL, CE, RoHS, UKCA		
	Anti - Skid Glass Certification	UNE ENV12633 (Class 3), DIN 51130 (R-12), DIN 51097 (Class B), ASTM C 1028-07 (DRY: ≥ 0,7, WET: ≥ 0,6), EN101:91 MOHS (4-Point scale)		

---


**SPECIFICATION**

---

<b>Not Included Items</b>	
<b>ACCESSORIES</b>	Mounting
	Eminere Inground Mounting Sleeve
	Eminere Inground Cover Plate Continuous (incl. 1x Cover Plate Middle)
	Eminere Inground Cover Plate End
	Eminere Inground Trim StandAlone
	Junction Box for Eminere Inground
Cables & Connectors	
Insulation Re-enterable Electrical Insulating Resin	
Cable CE WCA   Cable US WCA	

---

**DIMENSIONS**

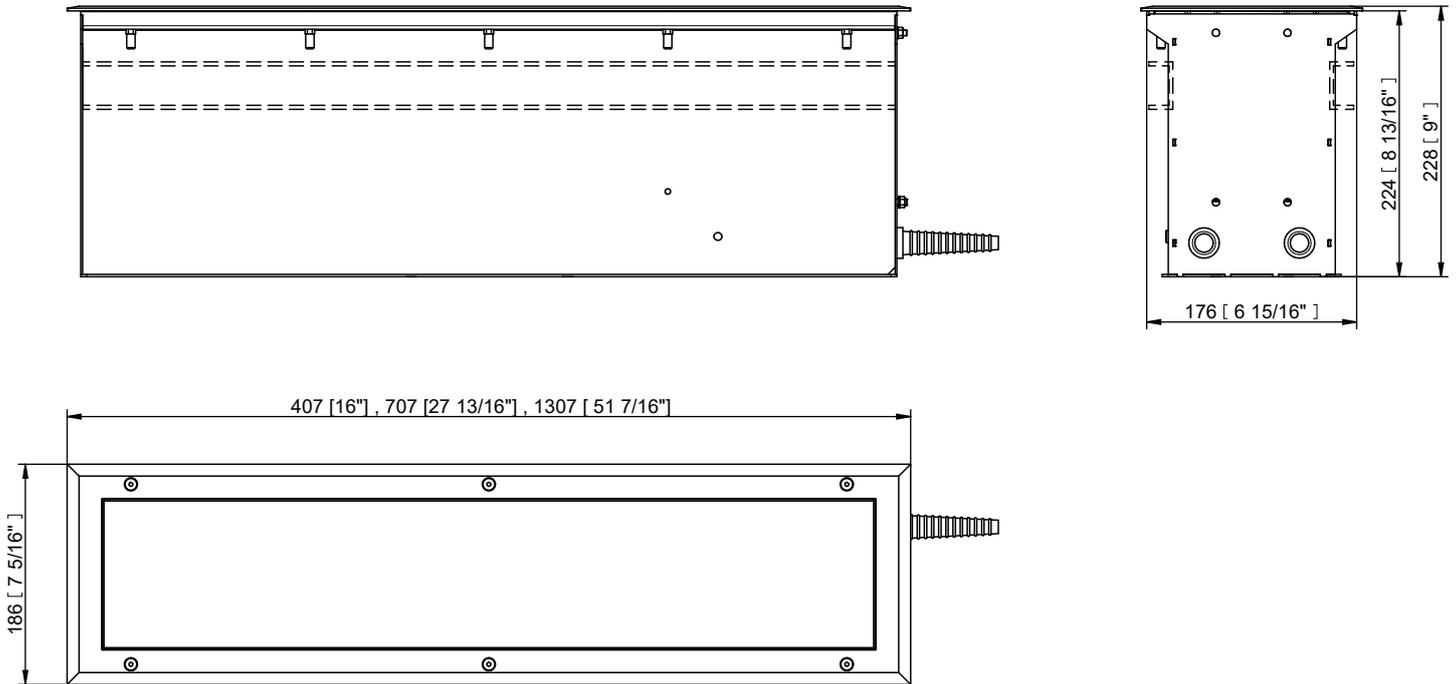

**PHOTOMETRIC OVERVIEW**

Based on RGBCW (CLEAR GLASS) version, all leds @ full


Lumen Output (lm)

	EMINERE INGROUND 1 MC	EMINERE INGROUND 2 MC	EMINERE INGROUND 4 MC
12°	938	1876	3752
15°	868	1736	3472
25°	870	1739	3478
35°	871	1741	3482
45°	865	1729	3458
65°	996	1728	3456
100°	837	1673	3346
10° x 30°	871	1741	3482
10° x 60°	853	1705	3410
15° x 45°	876	1752	3504
15° x 90°	864	1727	3454
30° x 90°	846	1691	3382
35° x 60°	860	1719	3438


## COLOUR MIXING PRINTS

**STAND ALONE** Specially designed glass printing to achieve optimal colour mixing and intensity distribution.

### SYMMETRICAL

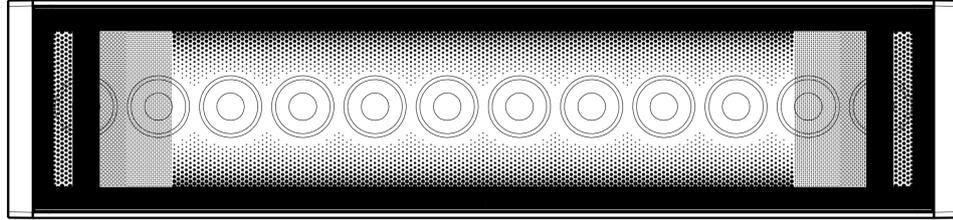


### WALLWASHER

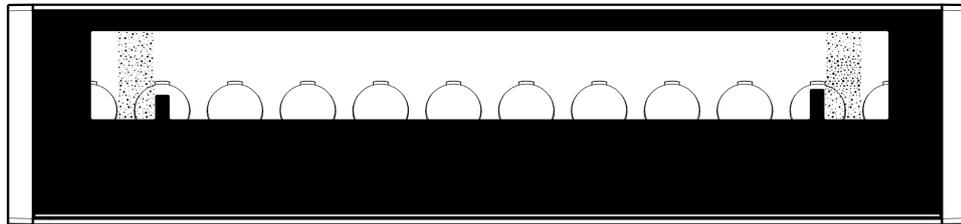

**Note:** Applies for RGBW, RGBA versions. Pure white and Tunable white versions are always without the end print (no matter on their position to other fixture).

## BY-SYMMETRICAL OPTIC OPTIONS

Bi-symmetrical: 10°x30°, 10°x60°, 35°x70°, 15°x90°

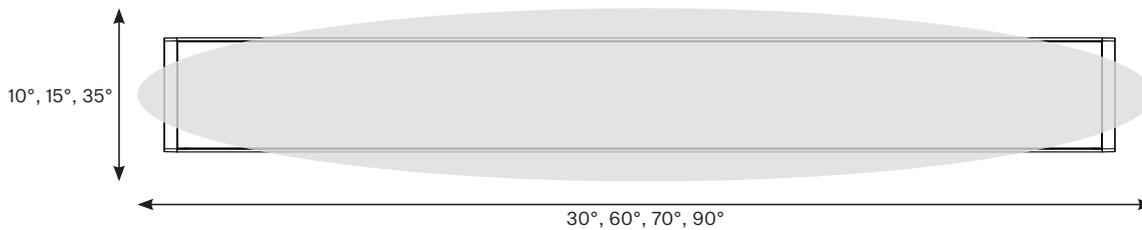

## E-BOX SPECIFICATION


<b>ELECTRICAL</b>	Input Voltage	120–277 V AC 50/60 Hz		
	Wireless DMX (Option)	Lumen Radio CRMX Technology		
	Interface Protocol	<b>E-box Lite:</b> USITT DMX512, RDM		
		<b>E-box Daisy / Star:</b> USITT DMX512, RDM, ArtNet, MA Net, MA Net2, sACN, Kling-Net		
Operating Modes	<b>E-box Lite / Daisy:</b> Fixture Mode, Pixel Mode, Output Mode			
	<b>E-Box Star:</b> Total Mode, Fixture Mode, Pixel Mode, Output Mode			
<b>CONTROL</b>	Display	Via Two Row LCD Display with Control Buttons or RDM communicator		
	Control System	E-box With Self Addressing Feature or Custom Setting Via LCD Display/RDM		
	Power Supply	Integrated		
	Connectivity	<b>E-box Lite</b>	144 of Eminere 1 (@ 230 V and 40m cable) via 1 Output	
		<b>E-box Daisy</b>	144 of Eminere 1 (@ 230 V and 40m cable) via 1 Output	
		<b>E-box Star</b>	144 of Eminere 1 (@ 230 V and 40m cable) via 6 Outputs	
	Length x Width x Height	<b>E-box Lite</b>	220 x 120 x 81 mm (8.66 x 4.72 x 3.18 in.)	
		<b>E-box Daisy</b>	260 x 160 x 91 mm (10.24 x 6.30 x 3.58 in.)	
		<b>E-box Star</b>	280 x 230 x 111 mm (11.02 x 9.06 x 4.37 in.)	
	Weight	1.67 kg   3.85 lbs	2.78 kg   6.13 lbs	4.4 kg   9.7 lbs
Housing	Die-Cast Aluminium Case			
<b>PHYSICAL</b>	Finish Options	Standard Colour	Graphite Black RAL 9011   Grey Aluminium RAL 9007   Pure White RAL 9010   Sandstone RAL 1014	
		Harsh Environment	Graphite Black RAL 9011   Grey Aluminium RAL 9007   Pure White RAL 9010   Sandstone RAL 1014	
	Cost Options	Custom RAL		
Cables / Connections	Cable Grommet (stainless steel)			
Mounting Method	Surface Mount , 4 Mounting Holes			
Protection Factor	IP67 / Suitable For Wet Locations			
IK Rating	IK10			
Cooling System	Convection			
Operating Ambient Temperature	-20 °C / +40 °C (-4 °F / +104 °F)			
<b>CERTIFICATION</b>	Listings	ETL / cETL, CE, RoHS, UKCA		

## COMPARISON


	E-BOX LITE	E-BOX DAISY	E-BOX STAR
<b>Power input</b>	1	1	1
<b>Fixture Output</b>	1	1	6
<b>Total load (current)</b>	16A	16A	16A
<b>DMX control</b>	YES	YES	YES
<b>RDM</b>	YES	YES	YES
<b>Art-Net</b>	NO	YES	YES
<b>Ethernet switch</b>	NO	YES	YES
<b>Kling-Net</b>	NO	YES	YES
<b>sACN</b>	NO	YES	YES
<b>MA Net, MA Net2</b>	NO	YES	YES

E-BOX DIMENSIONS


E-BOX LITE

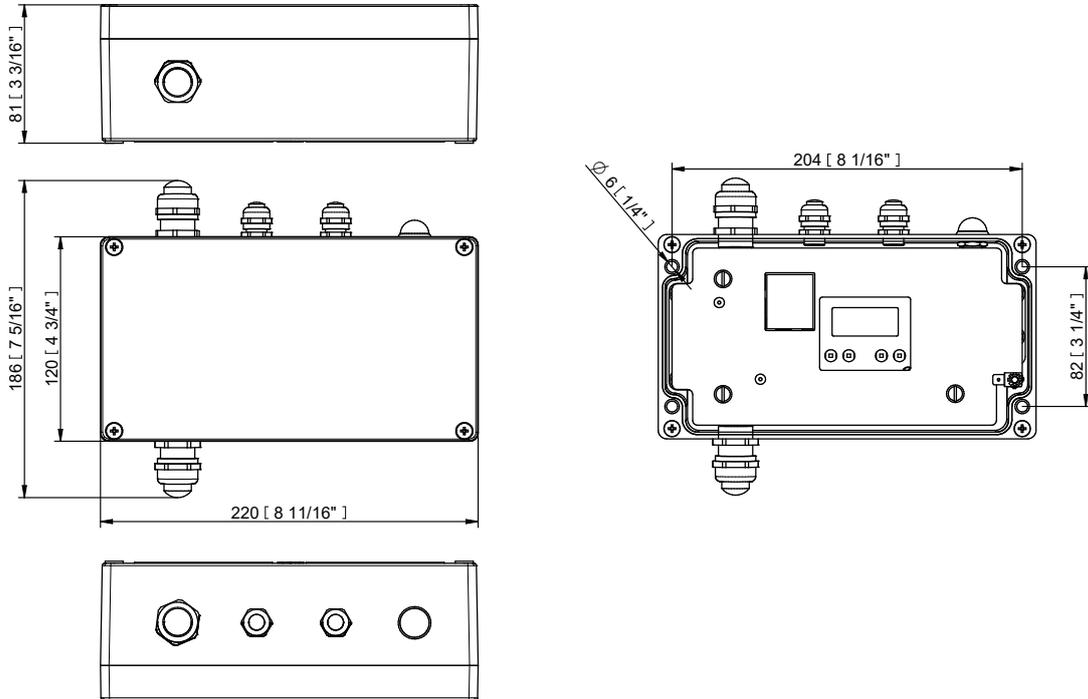

E-BOX DAISY

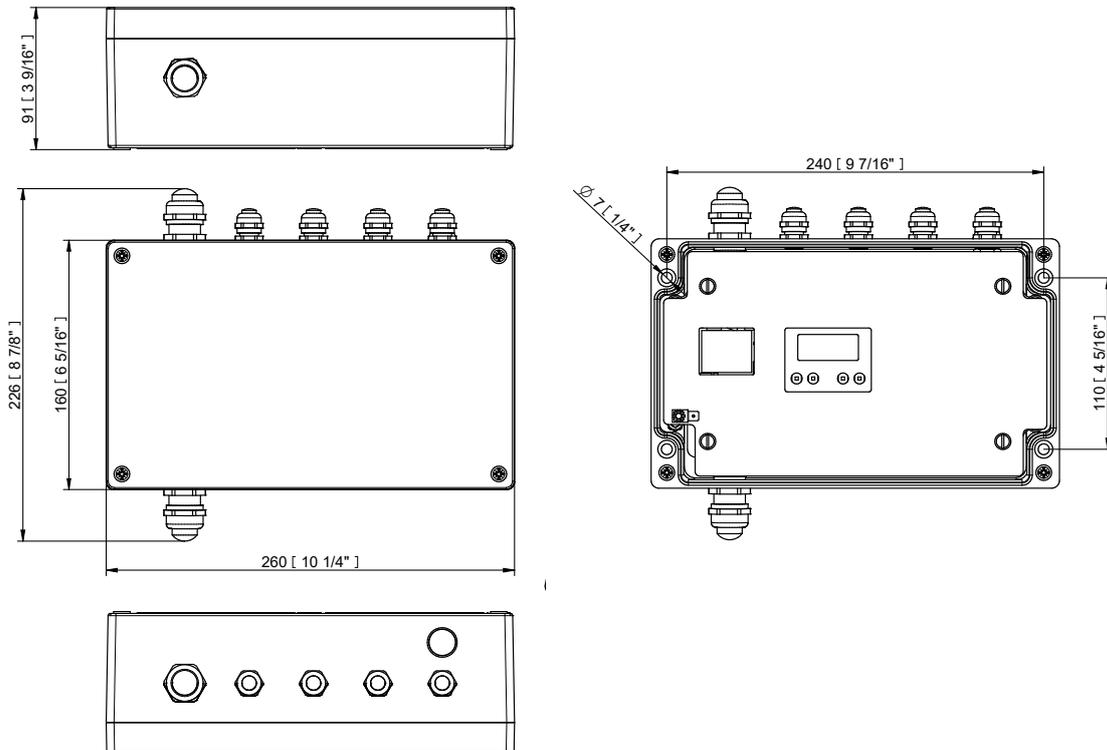

E-BOX STAR

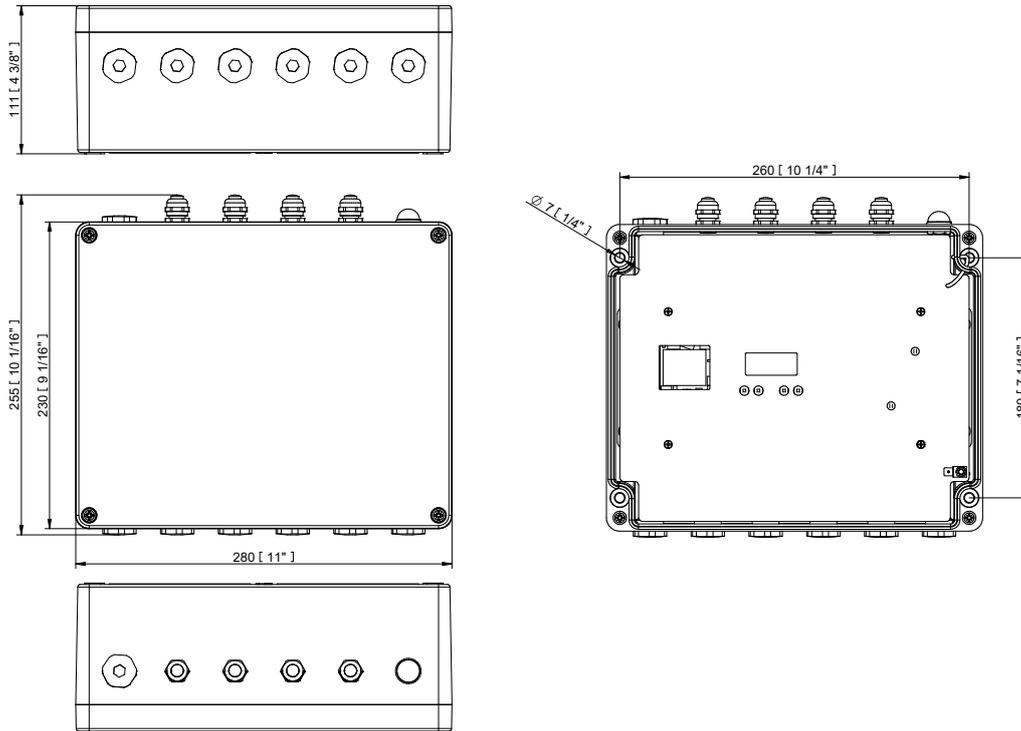

CONNECTIVITY


Following table shows maximum connected Emineres on each output of E-Box with respect of cable length.

	Cable length (m)	Voltage (V)			
		120	190	230	277
EMINERE INGROUND 2 MC	10	32	32	32	32
	20	32	32	32	32
	30	28	32	32	32
	50	17	32	32	32
	70	12	31	32	32
	100	9	21	32	32

	Cable length (m)	Voltage (V)			
		120	190	230	277
EMINERE INGROUND 4 MC	10	21	32	32	32
	20	21	32	32	32
	30	15	32	32	32
	50	9	22	32	32
	70	6	16	23	32
	100	4	11	16	23


Please read the E-boxes user manuals for more information about their setting.

**Important: the item "E-box mode" has to be set at "Pass Thr" (Personality - E-box mode - Pass Thr).**

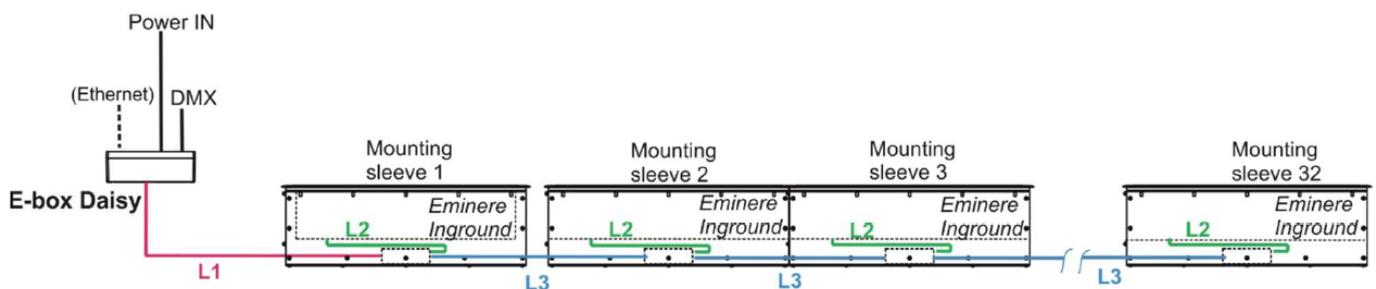

**MOUNTING ACCESSORIES (ORDER SEPARATELY)**

Mounting sleeve

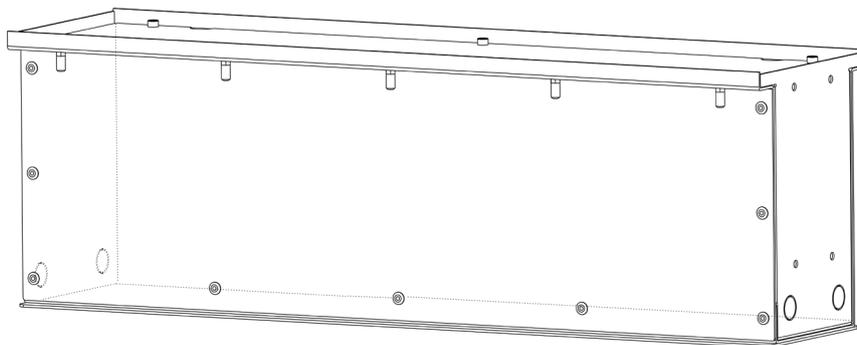


Cover Plates


Two types of Cover Plates must be ordered separately, depending on installation option:

- Cover Plate Continuous (includes set of 2pcs)
- Cover Plate End (includes set of 2pcs)

Examples:

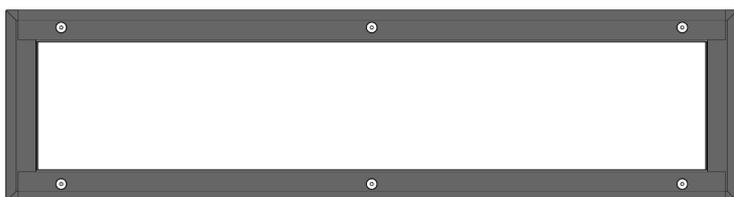



Cover plate set-up for STAND ALONE option (consist of 1x set of Cover Plate Continuous and 1x set of Cover Plate End).  
Cover Plate Continuous is always packed together with 1x Cover Plate Middle.

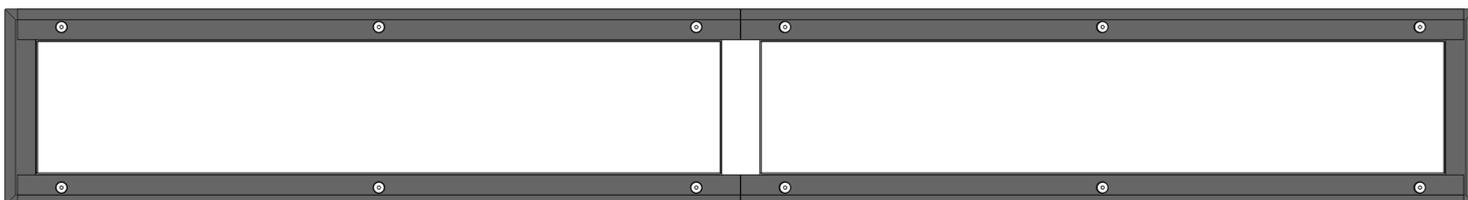



Cover plate set-up for HEAD2HEAD connection option (consist of 2x set of Cover Plate Continuous, 1x Cover Plate Middle and 1x set of Cover Plate End).  
Cover Plate Continuous is always packed together with 1x Cover Plate Middle.

PHOTOMETRIC DATA



Eminere Inground 4 MC RGBCW  
Clear Glass 9dg

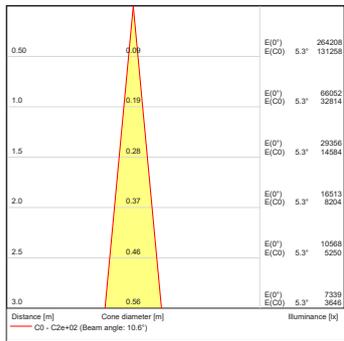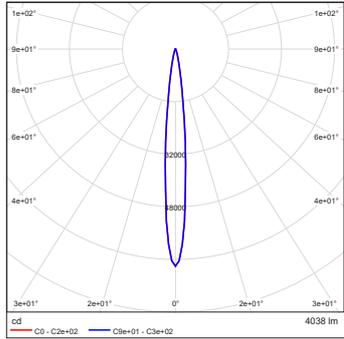



Eminere Inground 4 MC RGBCW  
Clear Glass 15dg

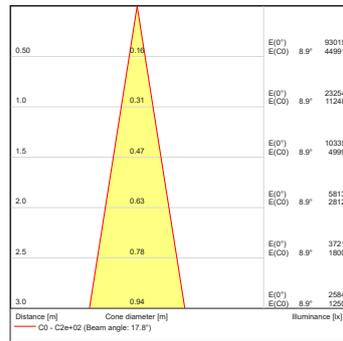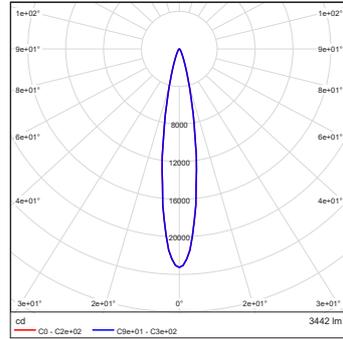



Eminere Inground 4 MC RGBCW  
Clear Glass 30dg

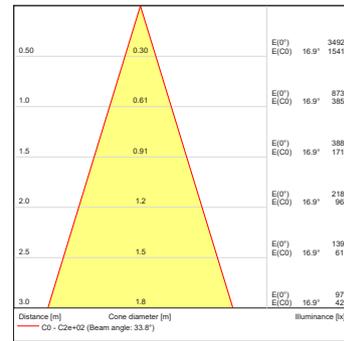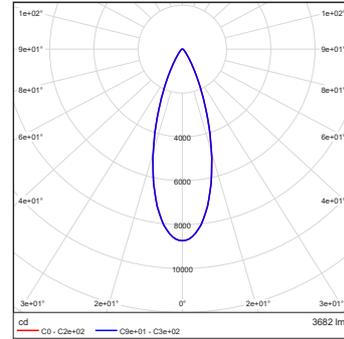



Eminere Inground 4 MC RGBCW  
Clear Glass 50dg

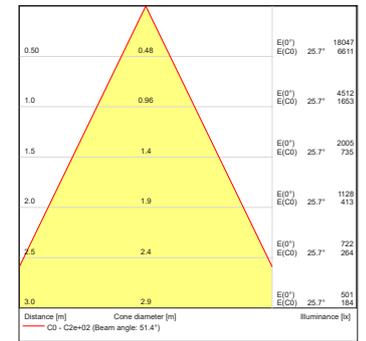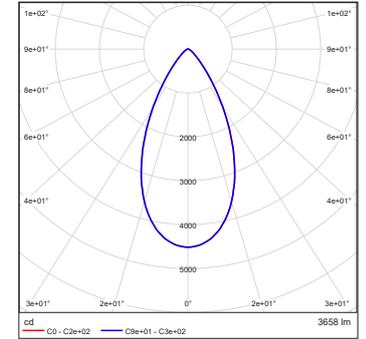

Eminere Inground 4 MC RGBCW  
Clear Glass 65dg

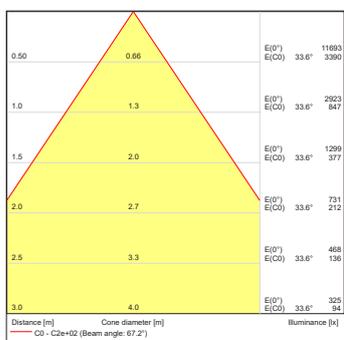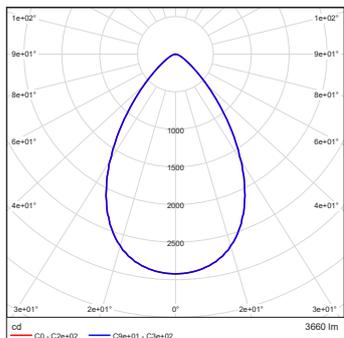


Eminere Inground 4 MC RGBCW  
Clear Glass 100dg

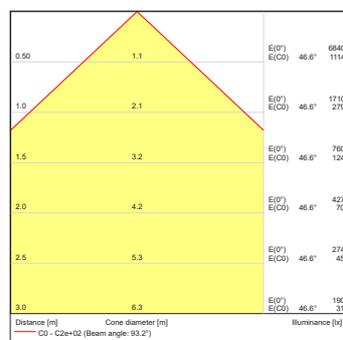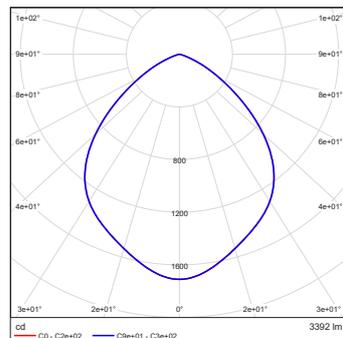


PHOTOMETRIC DATA


Eminere Inground 4 MC RGBCW  
Clear Glass 10dg x 30dg

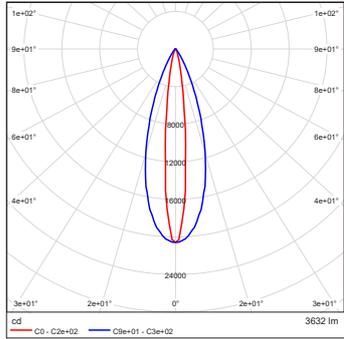






Eminere Inground 4 MC RGBCW  
Clear Glass 10dg x 60 dg

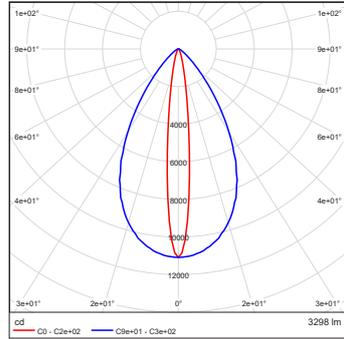


Eminere Inground 4 MC RGBCW  
Clear Glass 35dg x 70dg

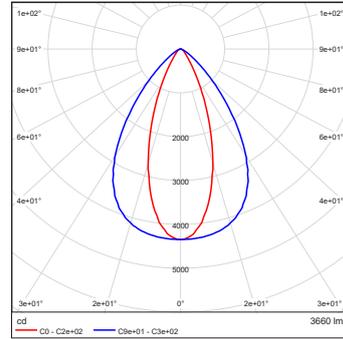


Eminere Inground 4 MC RGBCW  
Clear Glass 15dg x 90dg

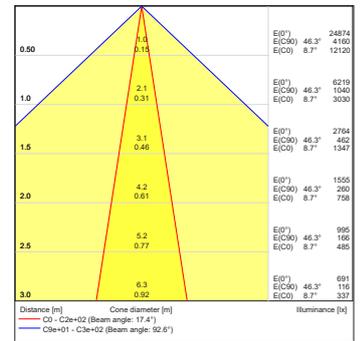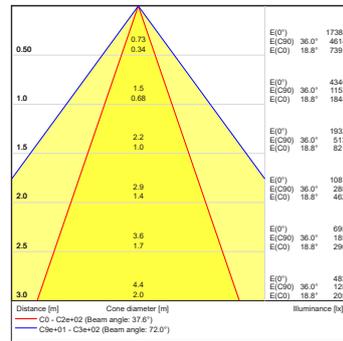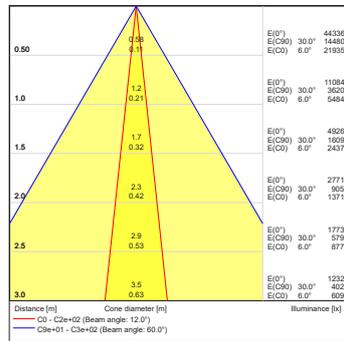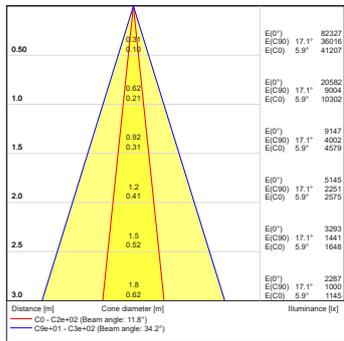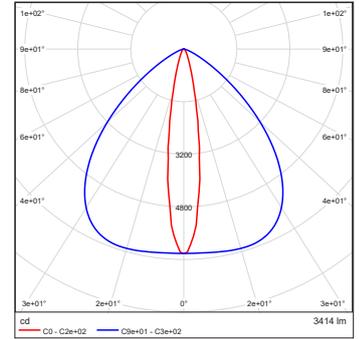

Eminere Inground 4 MC RGBCW  
Clear Glass WallWasher

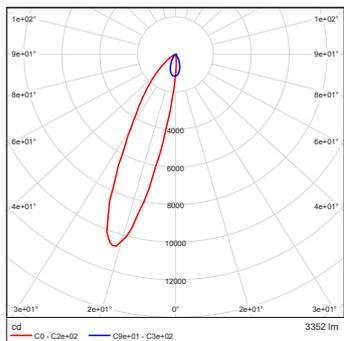


Eminere Inground 4 MC RGBCW  
Clear Glass Wide WallWasher

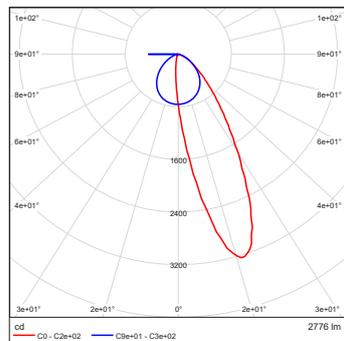

PHOTOMETRIC DATA


Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 18dg

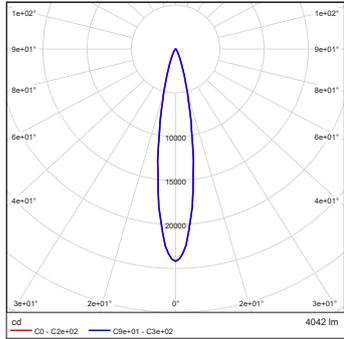

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(9.4°) E(C0)	Illuminance [lx]
0.50	0.17	96706	46953	
1.0	0.33	24176	11731	
1.5	0.50	10745	5214	
2.0	0.66	6044	2933	
2.5	0.83	3868	1877	
3.0	0.99	2886	1303	

Distance [m] Cone diameter [m]  
— C0 - C2e+02 (Beam angle: 18.8°)


Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 22dg

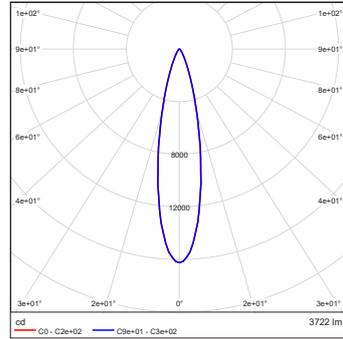

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(11.3°) E(C0)	Illuminance [lx]
0.50	0.20	64933	30797	
1.0	0.40	16233	7684	
1.5	0.60	7215	3415	
2.0	0.80	4058	1921	
2.5	1.00	2597	1229	
3.0	1.2	1804	854	

Distance [m] Cone diameter [m]  
— C0 - C2e+02 (Beam angle: 22.6°)


Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 35dg

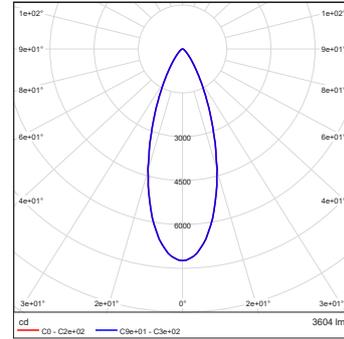

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(18.1°) E(C0)	Illuminance [lx]
0.50	0.33	28947	12486	
1.0	0.65	7237	3122	
1.5	0.96	3216	1387	
2.0	1.3	1809	780	
2.5	1.6	1158	499	
3.0	2.0	804	347	

Distance [m] Cone diameter [m]  
— C0 - C2e+02 (Beam angle: 36.2°)


Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 50dg

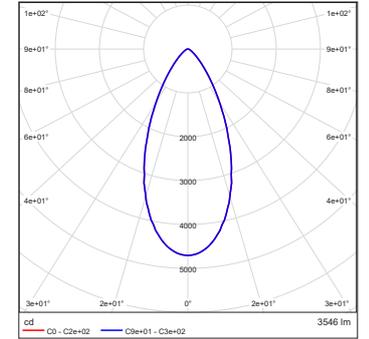

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(23.5°) E(C0)	Illuminance [lx]
0.50	0.43	18821	7929	
1.0	0.87	4705	1825	
1.5	1.3	2091	811	
2.0	1.7	1176	456	
2.5	2.2	753	292	
3.0	2.6	523	203	

Distance [m] Cone diameter [m]  
— C0 - C2e+02 (Beam angle: 47.0°)


Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 65dg

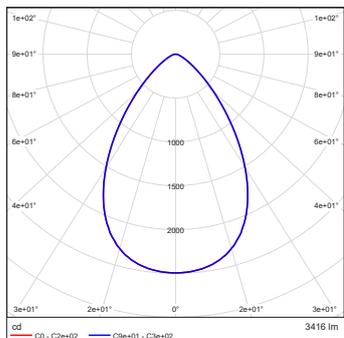

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(35.0°) E(C0)	Illuminance [lx]
0.50	0.70	9976	2757	
1.0	1.4	2484	689	
1.5	2.1	1108	306	
2.0	2.8	634	172	
2.5	3.5	399	110	
3.0	4.2	277	77	

Distance [m] Cone diameter [m]  
— C0 - C2e+02 (Beam angle: 70.0°)

Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 100dg

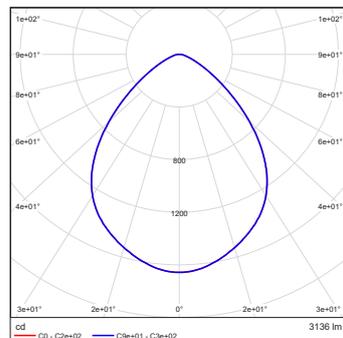


Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(43.8°) E(C0)	Illuminance [lx]
0.50	0.96	6628	1251	
1.0	1.9	1627	313	
1.5	2.9	738	139	
2.0	3.8	414	76	
2.5	4.8	265	50	
3.0	5.8	184	35	


Distance [m] Cone diameter [m]  
— C0 - C2e+02 (Beam angle: 87.6°)

PHOTOMETRIC DATA


Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 20dg x 35dg

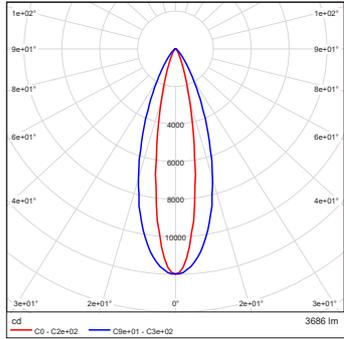






Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 20dg x 65dg

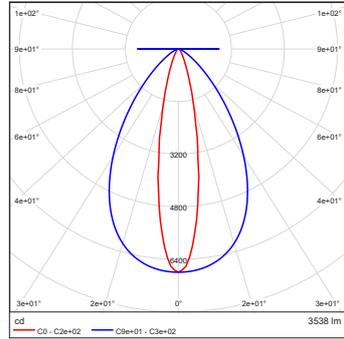


Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 40dg x 70dg

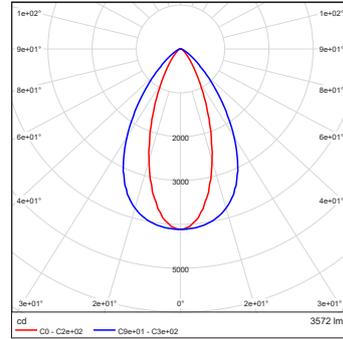

Eminere Inground 4 MC RGBCW  
Anti-Skid Glass 20dg x 90dg

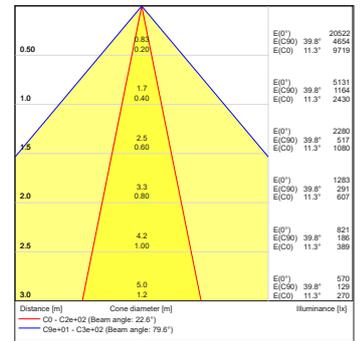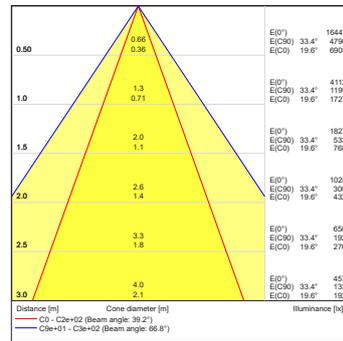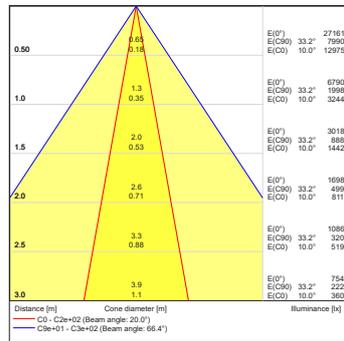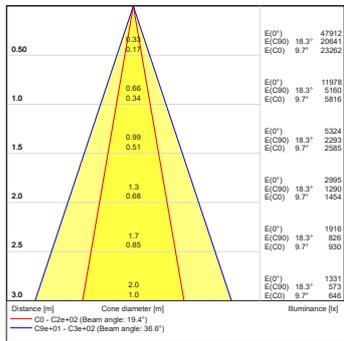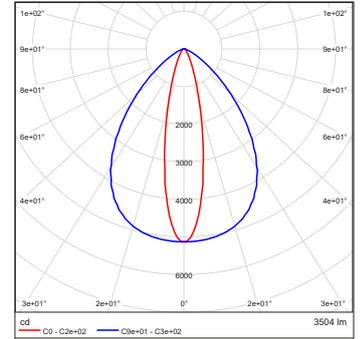

Eminere Inground 4 MC RGBCW  
Anti-Skid Glass WallWasher

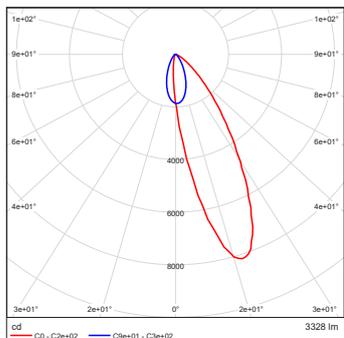

Eminere Inground 4 MC RGBCW  
Anti-Skid Glass Wide WallWasher

