

LYRAE™ S SC

Difficult inground installations are made easier with the Lyrae S SC. High light output comes from powerful LEDs and it can be used with a variety of optics, from narrow to wide, in addition to a bi-symmetrical option. The light source can be remotely tilted 25° from the horizontal position, always ensuring accurate illumination of the selected surface. Additionally, Lyrae S SC can be equipped with anti-skid glass featuring the highest standards of certification for anti-slip usage having no impact on the fixture's outstanding colour mixing.



KEY FEATURES

Lumen output & Light source


Providing perfectly mixed colour with luminous flux up to 1422 lm (@ PW 3000K), the 27 W Lyrae S SC luminaire utilises LEDs with 10° optics. Its excellent lumen maintenance of 90,000 hrs (L90B10) provides a dependable and long-term lighting installation.

Physical


Protected underground by high-pressure, die-cast aluminum, the above-ground stainless steel and glass cover provides an elegant and durable lighting solution in all kind of weather. The glass cover can be clear or with anti-skid treatment for inground applications, and its durability is guaranteed by IP67 and IK10 certification.

COLOURS

STANDARD



UPON REQUEST

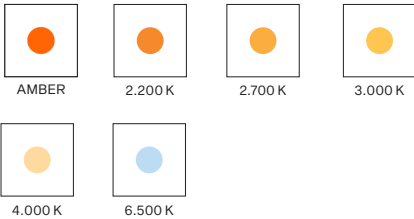

CONTROL & PROTOCOLS




STANDARD & SPECIFICATION




OPTIC OPTIONS


SYMMETRICAL (CLEAR GLASS)

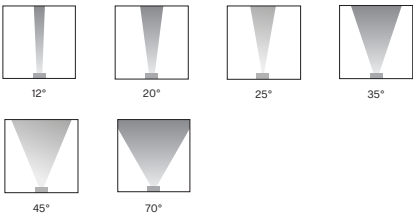

BI-SYMMETRICAL (CLEAR GLASS)

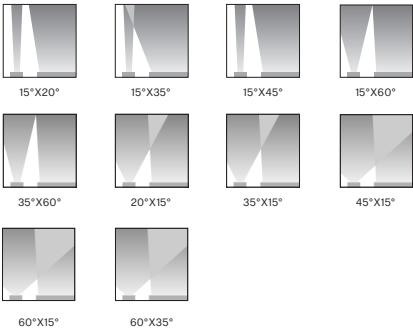

TRIM OPTIONS

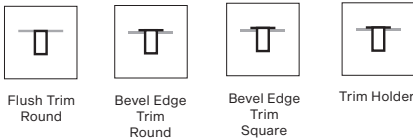

TRIM FINISH OPTIONS




SPECIFICATION


ELECTRICAL	Input Voltage	120–277 V AC 50/60 Hz	
	Typical Power Consumption	30 W +/-10 %	
OPTICAL	Light Source	High Power Single Chip LEDs	
	Colour Variants	Pure White (W - 3000 K) Tuneable White (2200–3000 K)	
		Custom Setup On Request: Amber, 2200 K, 2700 K, 3000 K, 4000 K, 6500 K	
	Beam Angle	Clear Glass	Symmetrical: 12° 20° 25° 35° 45° 70°
			Bi-symmetrical: 15°x20° 15°x35° 15°x45° 15°x60° 35°x60° 20°x15° 35°x15° 45°x15° 60°x15° 60°x35°
		Anti-Skid Glass	Symmetrical: 20° 25° 30° 40° 50° 70°
			Bi-symmetrical: 20°x25° 23°x25° 20°x65° 25°x45° 35°x60° 25°x20° 25°x23° 65°x20° 45°x25° 60°x35°
	Lumen Output Delivered	1422 lm (@10° PW 3000 K)	
	Projected Lumen Maintenance	L90B10 >90.000 hrs, Ta = 25°C / 77°F	
CONTROL	Interface Protocol	DMX/RDM DTP DALI 2 NFC	
	Operating Modes	DMX, Stand-alone	
	Settings / Addressing	RDM NFC (Stand-alone)	
	Power Supply	Integrated	
PHYSICAL	Flange Diameter x Diameter x Height	Bevel Egde Trim: ø 210 x ø 353 x 280 mm (ø 8.3 x ø 14 x 11.1 in.)	
	Weight	3.75 kg 8.16 lbs	
	Housing	High Pressure Die-Cast Aluminium Body Stainless Flange Tempered Glass (Clear or Anti-Skid)	
	Trim Options	Bevel Edge Trim Flush Trim	
	Trim Shape	Round Square	
	Trim Finish Options	Stainless steel	
	Cables / Connections	Integrated Junction Box	
	Mounting Method	External Mounting Sleeve	
	Adjustability	Motorised Tilt 0°–25° (One Direction Tilt) - Setting-up via NFC (password protected), or DMX	
	Protection Factor	IP68 / Suitable For Wet Locations (24 h @ 1 m)	
	IK Rating	IK10	
	Static Load Resistance	35 kN (TBC)	
	Cooling System	Convection	
	Operating Ambient Temperature	-20°C / +40°C (-4°F / +104°F)	
CERTIFICATION	Listings	ETL / cETL, CE, RoHS, UKCA	
ACCESSORIES	Not Included Items		
	Lyrae S Mounting Sleeve		
	Lyrae S Trim Holder		
	Junction Box (CE or US)		
	Trim for Lyrae S (Stainless Steel, Round, Bevel Edge)		
	Trim for Lyrae S (Stainless Steel, Round, Flush)		
	Trim for Lyrae S (Stainless Steel, Square, Bevel Edge)		
	Re-enterable Electrical Insulating Resin		
	Rock Guard		
DEMO SET	Lyrae S Demo Set	Includes: Lyrae fixture, Mounting Sleeve, Trim, Set of Optical Foils (Not suitable for permanent instalations. IP2X.)	

DIMENSIONS


Lyrae S Trim Holder (Direct installation into pre-formed solid base; no sleeve required.)

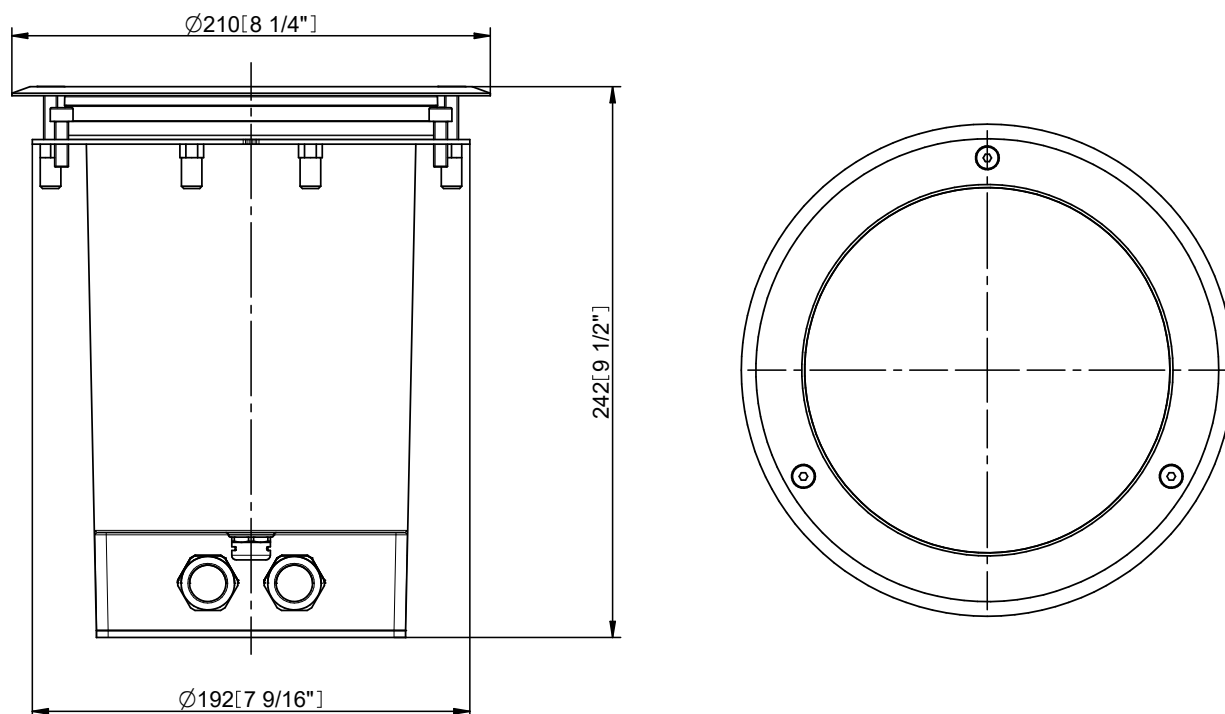


with Round beveled Trim

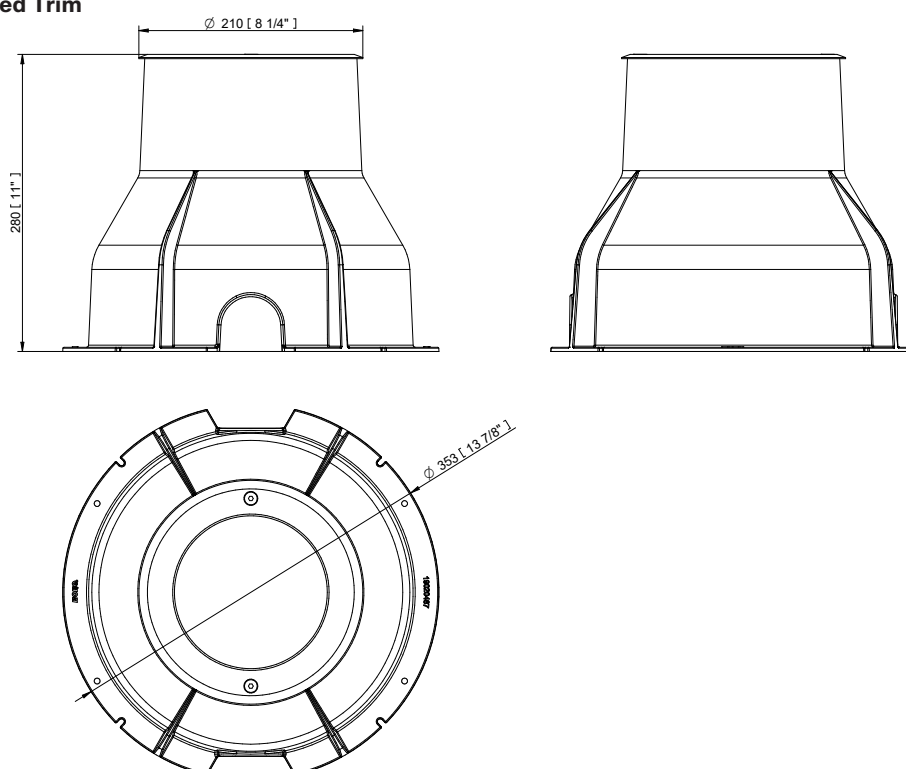

with Square beveled Trim

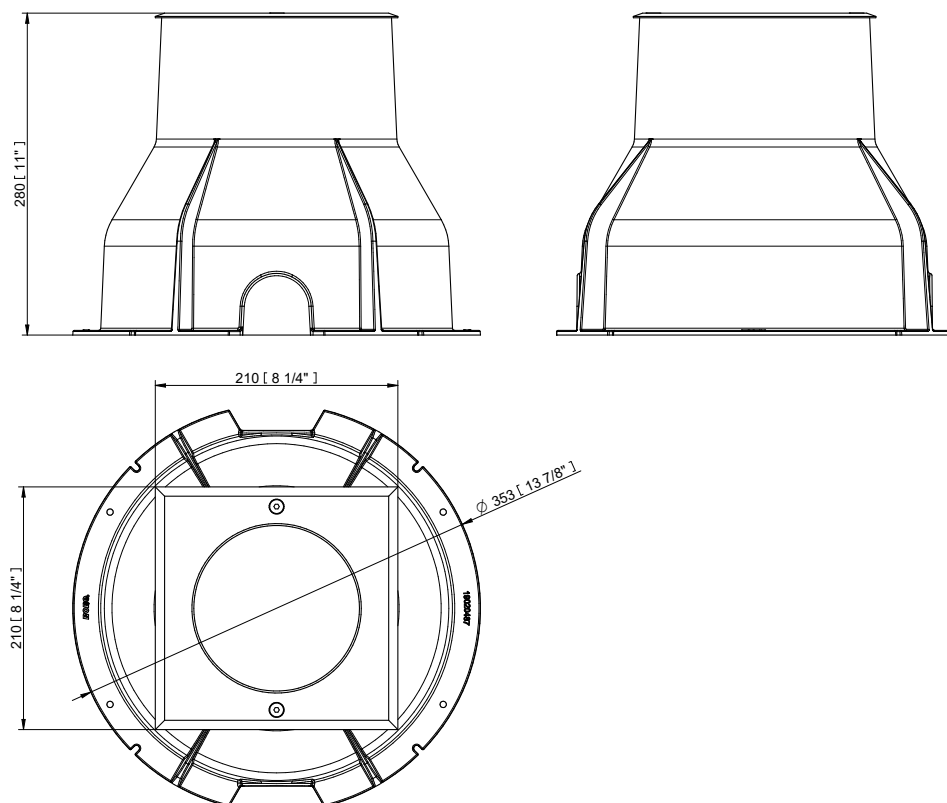

with Round flush Trim

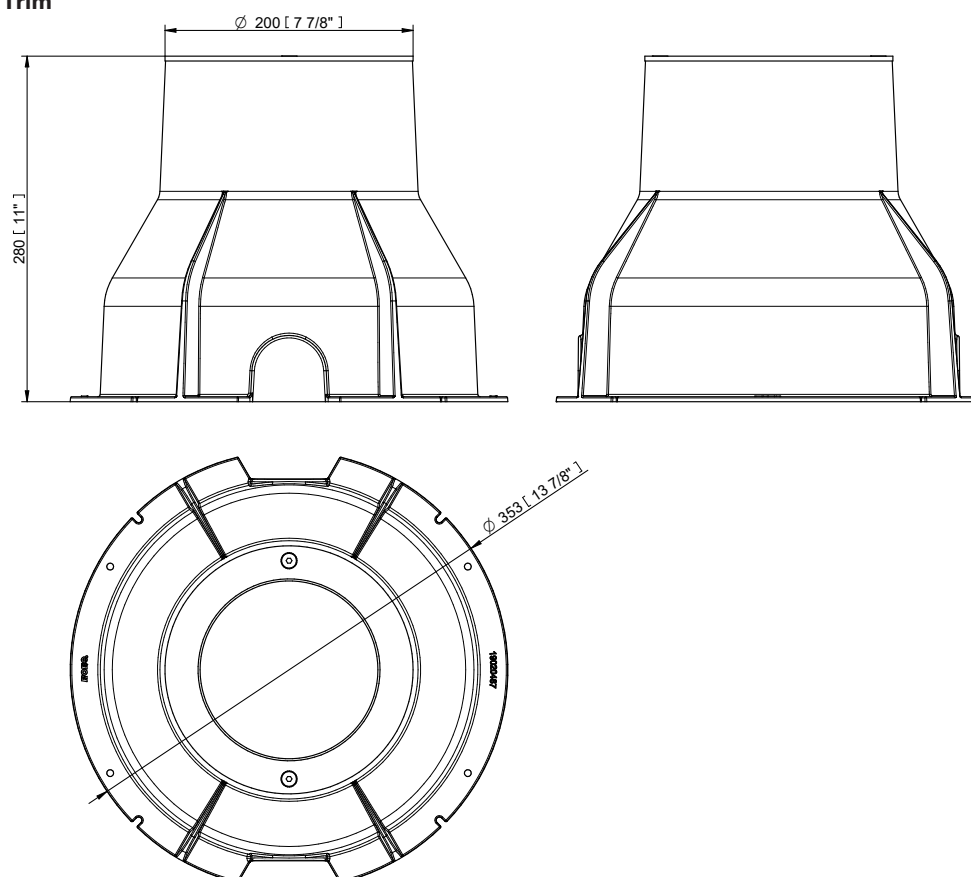


CONTROL AND CONNECTION OPTIONS - CE

DALI

Example of ordering code: Lyrae S SC RGBCW 15° DALI

- 1) Junction Box
- 2) Hybrid Cable (1305 3693)
or Scope of Others


Note: All Anolis cables must be in placed in protective conduit – not suitable for direct burial.

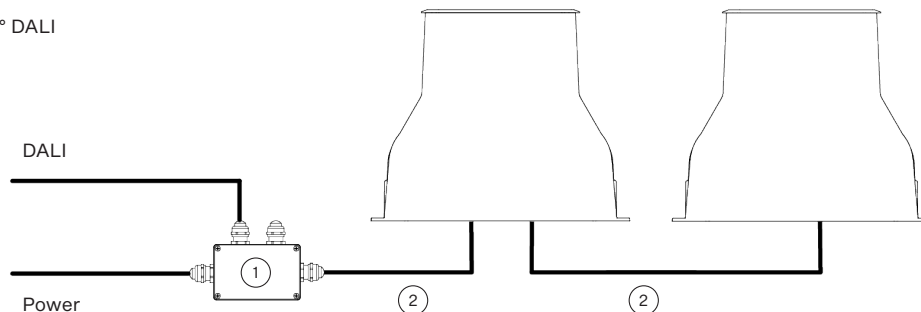

DMX

- 1) Junction Box
- 2) Cable (1305 1508)


Note: All Anolis cables must be in placed in protective conduit – not suitable for direct burial.

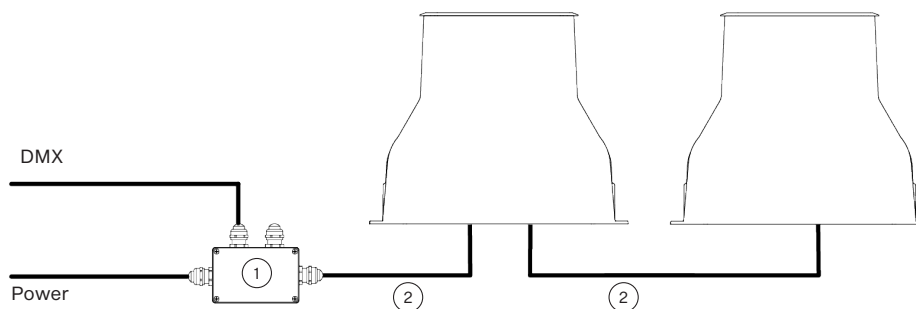

DMX or ETHERNET via E-BOX

- 1) Cable CE WCA (1305 3138)

Note: All Anolis cables must be in placed in protective conduit – not suitable for direct burial.

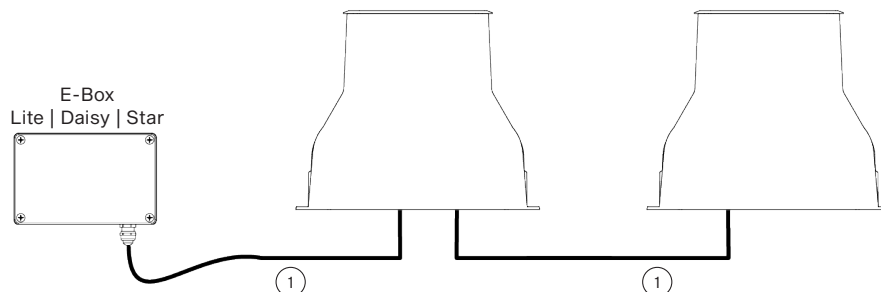


CONTROL AND CONNECTION OPTIONS - US

DALI

Example of ordering code: Lyrae S SC RGBCW 15° DALI

- 1) Junction Box
- 2) SJTW 5x 14AWG (1305 3336), black or Scope of Others


Note: All Anolis cables must be in placed in protective conduit – not suitable for direct burial.

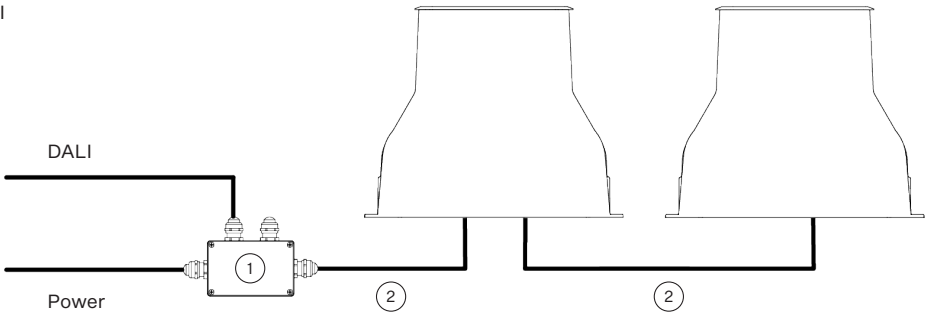

DMX or ETHERNET via E-BOX

- 1) Cable US WCA (1305 3139)


Note: All Anolis cables must be in placed in protective conduit – not suitable for direct burial.

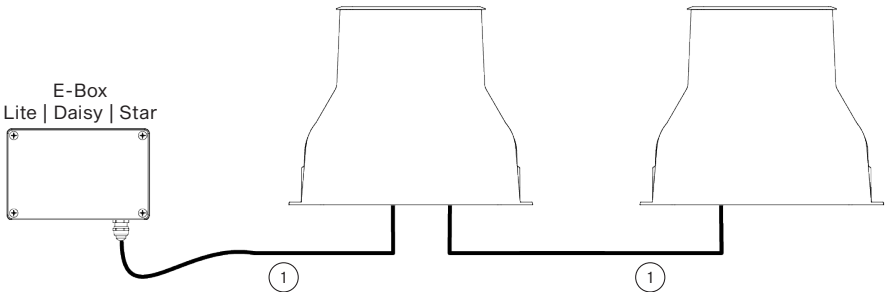

BI-SYMMETRICAL BEAM ANGLES

Bi-symmetrical (clear glass):

- 15°x20°,
- 15°x35°,
- 15°x45°,
- 15°x60°,
- 35°x60°

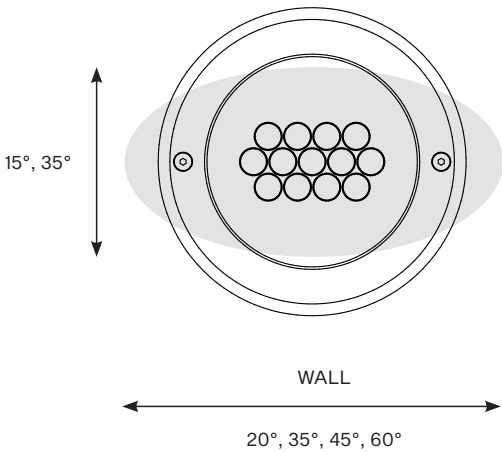

Bi-symmetrical (clear glass):

- 20°x15°,
- 35°x15°,
- 45°x15°,
- 60°x15°,
- 60°x35°

